

Jellyfish[®] Filter

Stormwater Treatment



The experts you need to solve your stormwater challenges



Contech is the leader in stormwater solutions, helping engineers, contractors and owners with infrastructure and land development projects throughout North America.

With our responsive team of stormwater experts, local regulatory expertise and flexible solutions, Contech is the trusted partner you can count on for stormwater management solutions.

Your Contech Team



STORMWATER CONSULTANT

It's my job to recommend the best solution to meet permitting requirements.



STORMWATER DESIGN ENGINEER

I work with consultants to design the best approved solution to meet your project's needs.



REGULATORY MANAGER

I understand the local stormwater regulations and what solutions will be approved.



SALES ENGINEER

I make sure our solutions meet the needs of the contractor during construction.

Contech is your partner in stormwater management solutions



Setting new standards in Stormwater Treatment – Jellyfish® Filter

The Jellyfish Filter has been tested in the field and laboratory, and has received approval from numerous stormwater regulatory agencies.


The Jellyfish Filter is a stormwater quality treatment technology featuring high flow pretreatment and membrane filtration in a compact stand-alone system. Jellyfish removes floatables, trash, oil, debris, TSS, fine silt-sized particles, and a high percentage of particulate-bound pollutants; including phosphorus, nitrogen, metals, and hydrocarbons. The high surface area membrane cartridges, combined with up-flow hydraulics, frequent, passive backwashing, and rinseable/reusable cartridges ensure long-lasting performance.

Jellyfish® Filter

How the Jellyfish® Filter Treats Stormwater


Tested in the field and laboratory ...

- Water enters the vault via an inlet bay where floating pollutants, oil, and grease are trapped behind a baffle wall.
- Water flows through the inlet bay transfer opening into the treatment chamber.
- Water is forced up from the treatment chamber, through the membrane filtration, and into the backwash pool.
- The water then fills and overflows the backwash pool and exits via the outlet bay transfer opening.
- As each storm subsides, the remaining water caught in the backwash pool flows back into the treatment chamber through the cartridges.
- This passive backwash extends cartridge life and prepares them for the next storm event. The draindown cartridges located outside the backwash pool enables water levels to balance.
- During peak flows, the internal weir allows high flows to bypass treatment, eliminating the need for an external bypass structure.

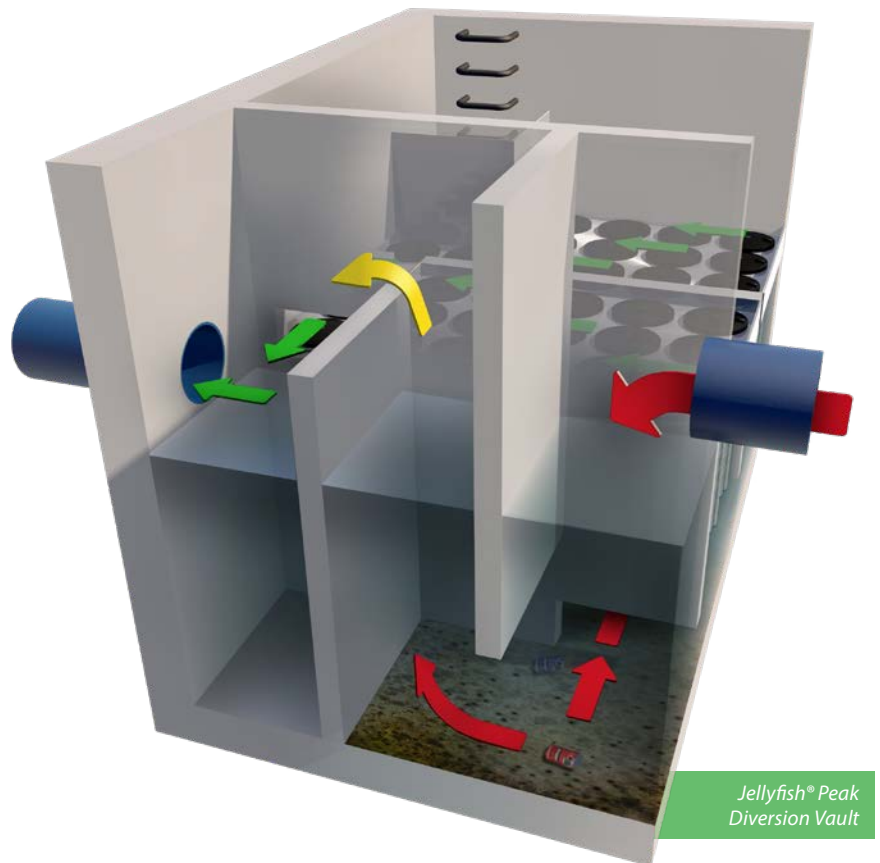

Learn More:
www.ContechES.com/jellyfish

Jellyfish® Filter Performance Testing Results

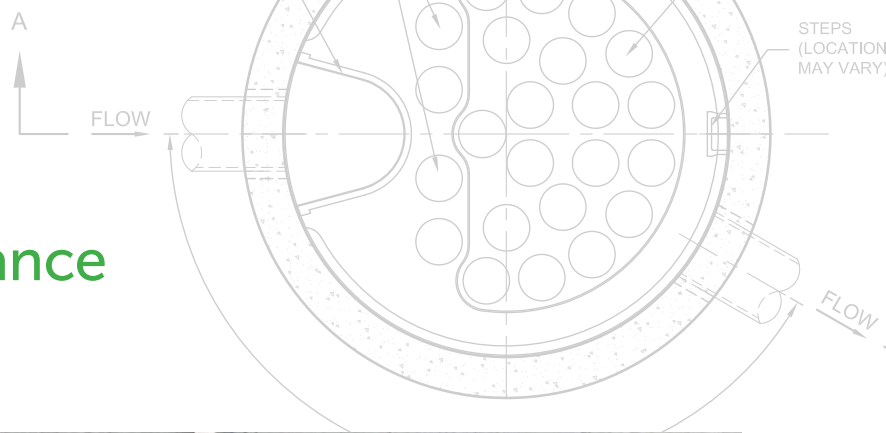

APPLICATION TIPS

- The Peak Diversion Jellyfish provides treatment and high-flow bypass in one structure, eliminating the need for a separate bypass structure.
- LID and GI are complemented by filtration solutions, as they help keep sites free from fine sediments that can impede performance, remove unsightly trash, and provide a single point of maintenance.
- Selecting a filter with a long maintenance cycle and low maintenance cost will result in healthy waterways and happy property owners.



The pleated tentacles of the Jellyfish® Filter provide a large surface area for pollutant removal.

POLLUTANT OF CONCERN	% REMOVAL
Total Suspended Solids (TSS)	85%
Total Phosphorus (TP)	75%
Total Copper (TCu)	67%
Total Zinc (TZn)	60%



Sources:
 WA DOE TAPE Testing: https://fortress.wa.gov/ecy/ezshare/wq/tape/use_designations/JELLYFISHfilterIMBRIUMguld.pdf

Jellyfish[®] Filter Features and Benefits

FEATURE	BENEFITS
High surface area membrane filtration	Low flux rate promotes cake filtration and slows membrane occlusion
High design treatment flow rate per cartridge (up to 80 gpm (5 L/s))	Compact system with a small footprint, lower construction cost
Low driving head (typically 18-21 inches or less (457-533 mm))	Design flexibility, lower construction cost
Lightweight cartridges with passive backwash	Easy maintenance and low life-cycle cost



The Jellyfish Filter can be configured in a manhole, catch basin, or vault.

Select Jellyfish[®] Filter Certifications and Verifications

The Jellyfish Filter has been reviewed by numerous state and federal programs, including:

- New Jersey Corporation for Advanced Technology (NJCAT) – Field Performance per TARP Tier II Protocol
- Washington State Department of Ecology (TAPE – GULD)
- Maryland Department of the Environment (MD DOE)
- Canada ISO 14034 Environmental Management - Environmental Technology Verification (ETV)
- Texas Commission on Environmental Quality (TCEQ)
- Virginia Department of Environmental Quality (VA DEQ)





Field tested and performance verified

Jellyfish[®] Filter Configurations

Multiple system configurations to optimize your site

The Jellyfish Filter can be manufactured in a variety of configurations: manhole, catch basin, vault, or custom configurations. Typically, 18-21 inches (457-533 mm) of driving head is designed into the system.

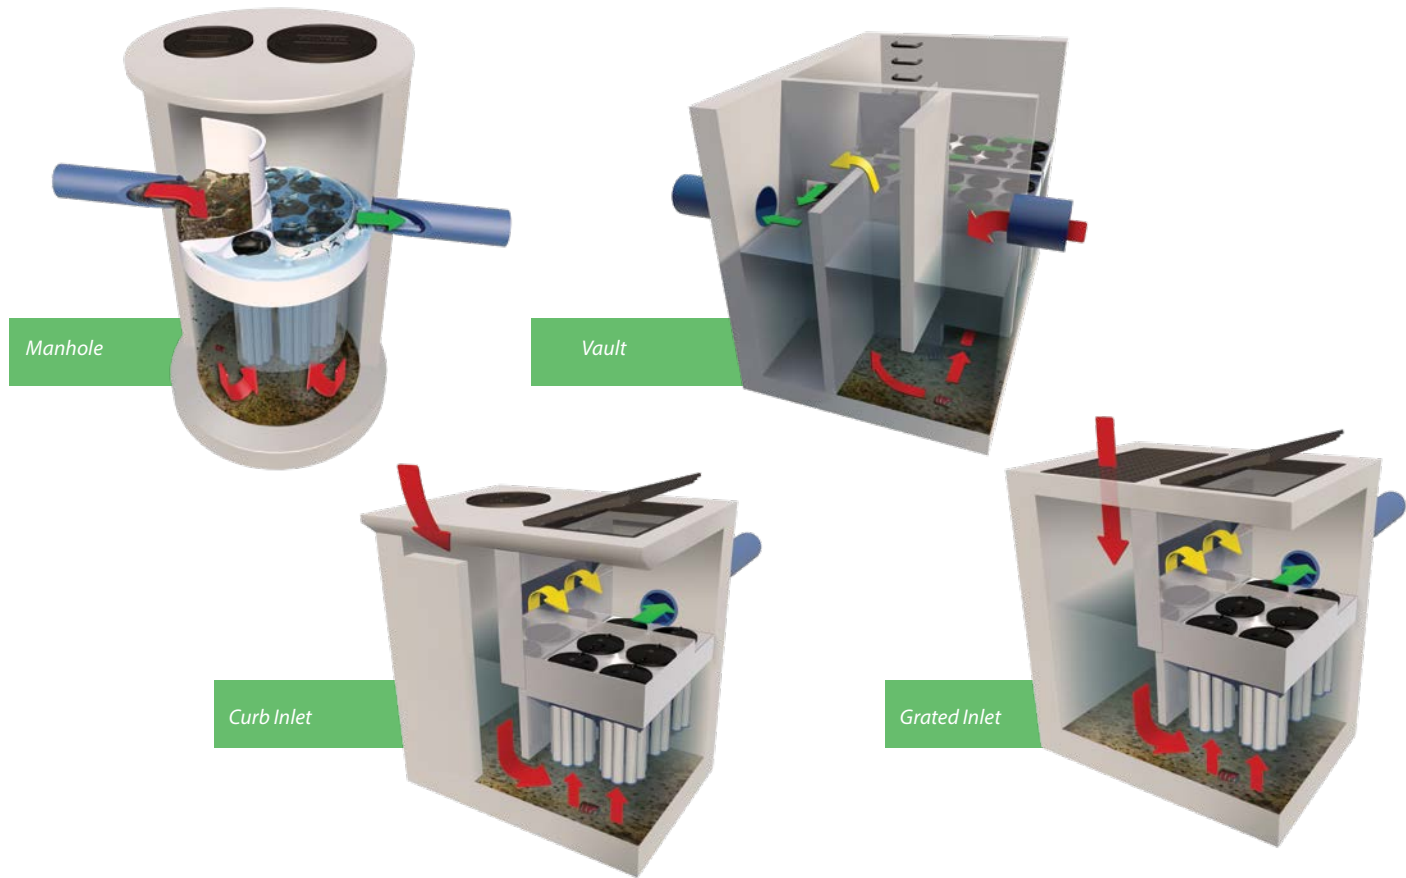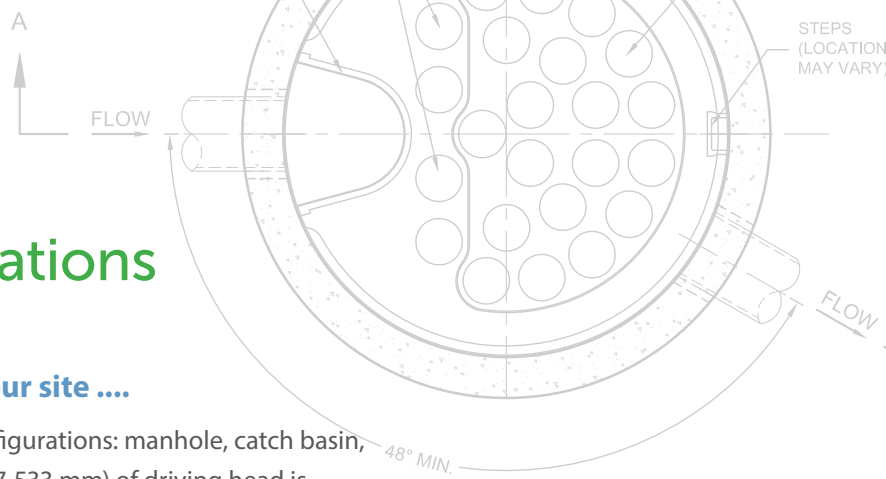

Jellyfish[®] Filter Maintenance

- Jellyfish Filter cartridges are light weight and reusable
- Maintenance of the filter cartridges is performed by removing, rinsing and reusing the cartridge tentacles.
- Vacuum extraction of captured pollutants in the sump is recommended at the same time.
- Full cartridge replacement intervals differ by site due to varying pollutant loading and type, and maintenance frequency. Replacement is anticipated every 2-5 years.
- Contech[®] has created a network of Certified Maintenance Providers to provide maintenance on stormwater BMPs.



The Jellyfish[®] Filter tentacle is light and easy to clean.

A partner you can rely on



STORMWATER
SOLUTIONS



PIPE
SOLUTIONS



STRUCTURES
SOLUTIONS

Few companies offer the wide range of high-quality stormwater resources you can find with us — state-of-the-art products, decades of expertise, and all the maintenance support you need to operate your system cost-effectively.

THE CONTECH WAY

Contech® Engineered Solutions provides innovative, cost-effective site solutions to engineers, contractors, and developers on projects across North America. Our portfolio includes bridges, drainage, erosion control, retaining wall, sanitary sewer and stormwater management products.

TAKE THE NEXT STEP

For more information: www.ContechES.com

NOTHING IN THIS CATALOG SHOULD BE CONSTRUED AS A WARRANTY. APPLICATIONS SUGGESTED HEREIN ARE DESCRIBED ONLY TO HELP READERS MAKE THEIR OWN EVALUATIONS AND DECISIONS, AND ARE NEITHER GUARANTEES NOR WARRANTIES OF SUITABILITY FOR ANY APPLICATION. CONTECH MAKES NO WARRANTY WHATSOEVER, EXPRESS OR IMPLIED, RELATED TO THE APPLICATIONS, MATERIALS, COATINGS, OR PRODUCTS DISCUSSED HEREIN. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND ALL IMPLIED WARRANTIES OF FITNESS FOR ANY PARTICULAR PURPOSE ARE DISCLAIMED BY CONTECH. SEE CONTECH'S CONDITIONS OF SALE (AVAILABLE AT WWW.CONTECHES.COM/COS) FOR MORE INFORMATION.

CONTECH[®]
ENGINEERED SOLUTIONS

Get social with us:    
800-338-1122 | www.ContechES.com