



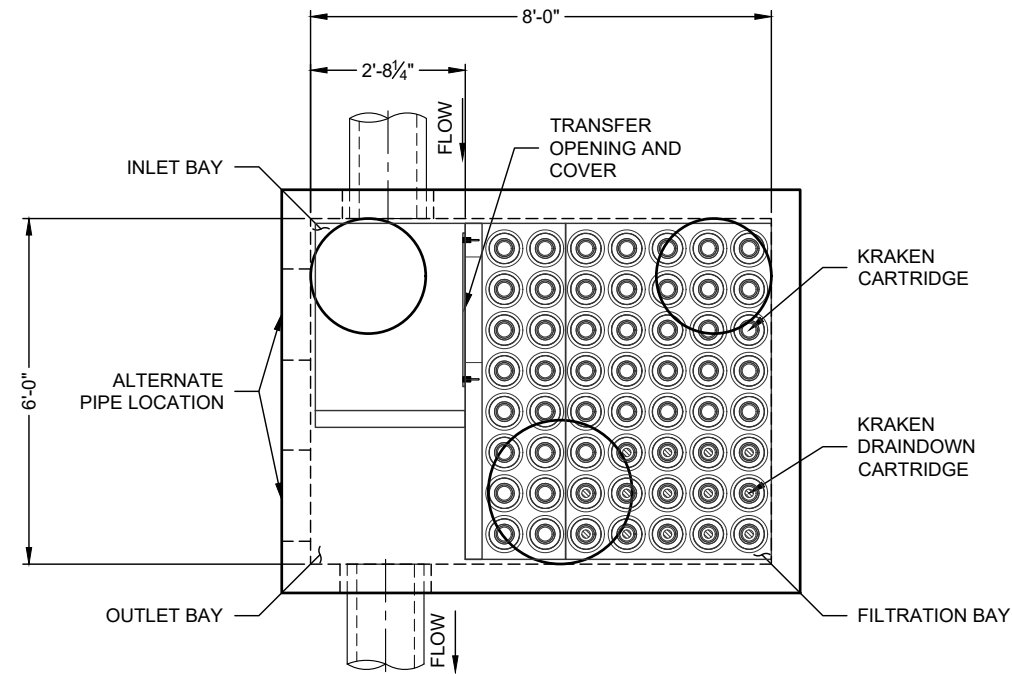

PLAN

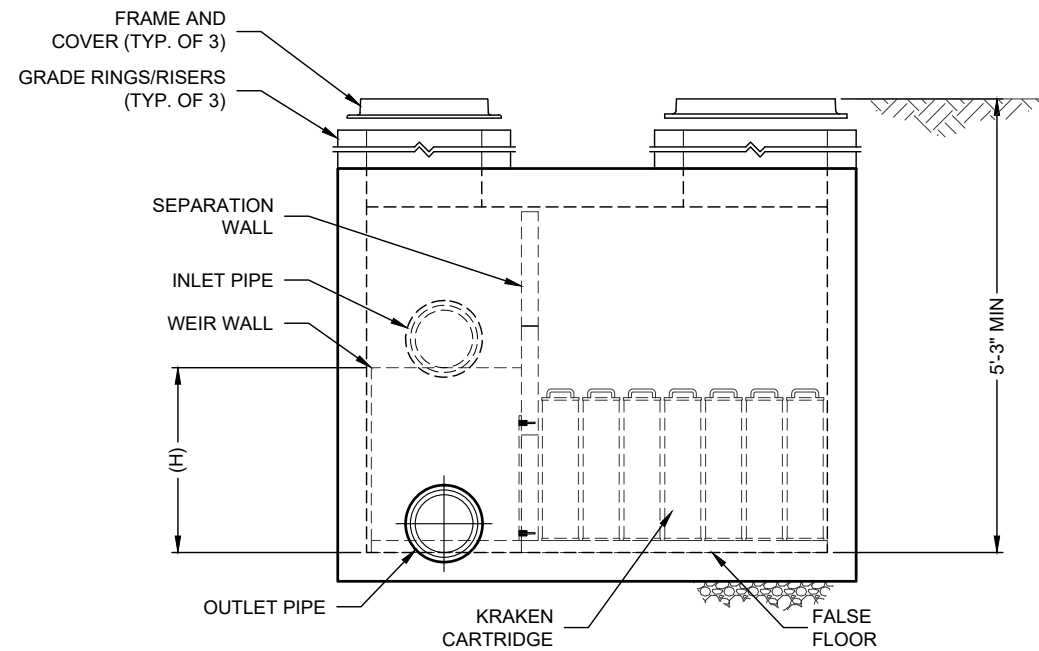


ELEVATION

THE KRACKEN®
FOR PATENT INFORMATION, GO TO www.ContechES.com/IP


KRAKEN FILTER DESIGN NOTES

- KRAKEN FILTER TREATMENT CAPACITY VARIES BY CARTRIDGE COUNT AND LOCALLY APPROVED SURFACE AREA SPECIFIC FLOW RATE. PEAK CONVEYANCE CAPACITY TO BE DETERMINED BY ENGINEER OF RECORD
- A 6' x 8' PEAK DIVERSION STYLE KRAKEN FILTER (KFPD0608) IS SHOWN WITH THE MAXIMUM NUMBER OF CARTRIDGES (56) AND IS AVAILABLE IN
- A LEFT INLET (AS SHOWN) OR A RIGHT INLET CONFIGURATION
- ALL PARTS AND INTERNAL ASSEMBLY PROVIDED BY CONTECH UNLESS NOTED OTHERWISE

CARTRIDGE HEIGHT	30"	20"	10"
RECOMMENDED HYDRAULIC DROP (H)	38.5"	28.5"	18.5"
SPECIFIC FLOW RATE (gpm/sf)	0.10	0.10	0.10
CARTRIDGE FLOW RATE (gpm)	17	10.6	4.9



FRAME AND GRATE
(SIZE MAY VARY)
(NOT TO SCALE)



FRAME AND COVER
(DIAMETER MAY VARY)
(NOT TO SCALE)

SITE SPECIFIC DATA REQUIREMENTS

STRUCTURE ID			*
WATER QUALITY FLOW RATE (cfs)			*
PEAK FLOW RATE (cfs)			*
RETURN PERIOD OF PEAK FLOW (yrs)			*
CARTRIDGE HEIGHT (SEE TABLE ABOVE)			*
# OF CARTRIDGES REQUIRED			*
PIPE DATA:	I.E.	MATERIAL	DIAMETER
INLET PIPE	*	*	*
OUTLET PIPE	*	*	*
UPSTREAM RIM ELEVATION			*
DOWNSTREAM RIM ELEVATION			*
ANTI-FLOTATION BALLAST	WIDTH	HEIGHT	
	*	*	
NOTES/SPECIAL REQUIREMENTS: *			
* PER ENGINEER OF RECORD *			

GENERAL NOTES

1. CONTECH TO PROVIDE ALL MATERIALS UNLESS NOTED OTHERWISE.
2. DIMENSIONS MARKED WITH () ARE REFERENCE DIMENSIONS. ACTUAL DIMENSIONS MAY VARY.
3. ALTERNATE DIMENSIONS ARE IN MILLIMETERS [mm] UNLESS NOTED OTHERWISE.
4. FOR FABRICATION DRAWINGS WITH DETAILED STRUCTURE DIMENSIONS AND WEIGHTS, PLEASE CONTACT YOUR CONTECH REPRESENTATIVE. www.ContechES.com
5. KRAKEN FILTER WATER QUALITY STRUCTURE SHALL BE IN ACCORDANCE WITH ALL DESIGN DATA AND INFORMATION CONTAINED IN THIS DRAWING. CONTRACTOR TO CONFIRM STRUCTURE MEETS REQUIREMENTS OF PROJECT.
6. STRUCTURE SHALL MEET AASHTO HS20 LOAD RATING, ASSUMING EARTH COVER OF 0' - 10' AND GROUNDWATER ELEVATION AT, OR BELOW, THE OUTLET PIPE INVERT ELEVATION. ENGINEER OF RECORD TO CONFIRM ACTUAL GROUNDWATER ELEVATION. CASTINGS SHALL MEET AASHTO M306 AND BE CAST WITH THE CONTECH LOGO.

INSTALLATION NOTES

- A. ANY SUB-BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY ENGINEER OF RECORD.
- B. CONTRACTOR TO PROVIDE EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE KRAKEN FILTER STRUCTURE.
- C. CONTRACTOR TO INSTALL JOINT SEALANT BETWEEN ALL SECTIONS AND ASSEMBLE STRUCTURE.
- D. CONTRACTOR TO PROVIDE, INSTALL, AND GROUT PIPES. MATCH OUTLET PIPE INVERT WITH OUTLET BAY FLOOR.
- E. CONTRACTOR TO TAKE APPROPRIATE MEASURES TO PROTECT CARTRIDGES FROM CONSTRUCTION-RELATED EROSION RUNOFF.
- F. CONTRACTOR TO REMOVE THE TRANSFER OPENING COVER WHEN THE SYSTEM IS ACTIVATED.

CONTECH®
ENGINEERED SOLUTIONS LLC
A QUANTIFI COMPANY

9100 Centre Pointe Dr., Suite 400, West Chester, OH 45069
800-338-1122 513-645-7000 513-645-7993 FAX

HIGH CAPACITY (HC) KRAKEN FILTER
6' x 8' PEAK DIVERSION KRAKEN FILTER
STANDARD DETAIL