


Jellyfish[®] Filter Vault Installation Guide



Jellyfish Filter Vault Installation Guide

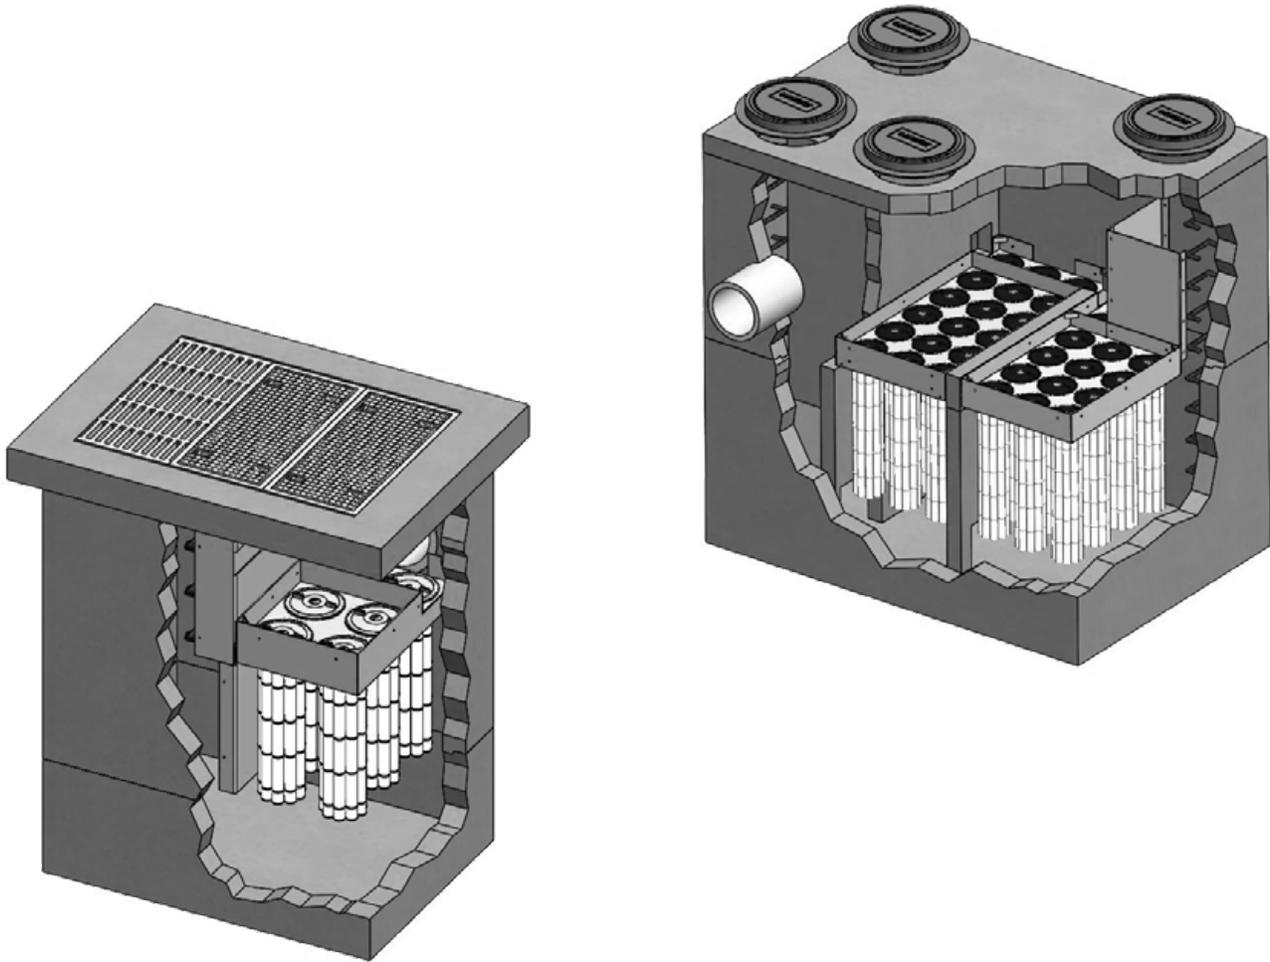

WARNINGS / CAUTION

1. **FALL PROTECTION** may be required.
2. **WATCH YOUR STEP** if standing on the Jellyfish Deck at any time. Great care and safety must be taken while walking or maneuvering on the Jellyfish Filter Deck to prevent stepping into or through a cartridge hole or slipping.
3. The Jellyfish Deck can be **SLIPPERY WHEN WET**.
4. If the top slab, covers, or hatches have not yet been installed or are removed for any reason, great care must be taken to **NOT DROP ANYTHING ONTO THE JELLYFISH FILTER DECK**. The Jellyfish Filter deck and cartridge receptacle rings may be damaged under high impact loads. This type of activity voids all warranties.

Safety Notice

Jobsite safety is a topic and a practice addressed comprehensively by others. The inclusions here are merely reminders to whole areas of Safety Practice that are the responsibility of the Owner(s), Manager(s), and Contractor(s). OSHA and Canadian OSH, Federal, State/Provincial, and Local Jurisdiction Safety Standards apply on any given site or project. The knowledge and applicability of those responsibilities is the Contractor's responsibility and outside the scope of Contech Engineered Solutions.

Confined Space Entry

Secure all equipment and training to meet applicable local and OSHA regulations regarding confined space entry. It is the Contractor's or entry personnel's responsibility to proceed safely at all times.

Personal Safety Equipment

Contractor is responsible to provide and wear appropriate personal protection equipment as needed. Make sure all trained staff and certified personnel are equipped and all equipment is checked for proper operation and safety features prior to use.

- Fall protection equipment
- Safety boots
- Gloves
- Hard hat
- Eye protection
- Ear protection
- Ventilation and Respiratory protection
- Maintenance and Protection of Traffic Plan

Unloading and Handling

Any unloading/handling guidance of the Jellyfish® Filter unit and precast sections is beyond the scope of work of Contech, but can be obtained from the precaster. Contact Contech to obtain contact information from precaster. Handle Jellyfish Filter components with care. Special lift gear and rigging may be necessary to unload and handle any precast components, which is the responsibility of the site Contractor.



Do not damage the parts in handling or unloading, and if parts are damaged prior to off-loading, please immediately call Contech.

The Contractor is responsible for the inspection of all Jellyfish Filter unit components shipped and all components shall be inspected at time of delivery by the site Engineer/Inspector and the Contractor. Any nonconformance to approved drawings or damage to any part of the system shall be documented on the shipping ticket. Contech should be contacted immediately. Damage to the unit during and after unloading shall be corrected at the expense of the Contractor. Any necessary repairs shall be made to the acceptance of the Engineer/Inspector.

Crane Selection

The Contractor is responsible for selecting the appropriate equipment to safely rig, lift, unload, and set-in-place the Jellyfish Filter vault system, as well as provide a safe environment at the jobsite for the safe offloading and installation/assembly of the structure. Contech or the precast producer will provide the Contractor with the maximum lift weight of the heaviest precast component. Safety considerations of crane size, placement, ground support, stability, distance to excavation, swing and lifting radius, overhead conflicts, permits, or traffic control and other items must be carefully addressed but are outside the responsibility of Contech

Excavation Safety

Any site excavation and shoring is beyond the scope of work of Contech. **This is the responsibility of the Contractor, and all OSHA, Canadian OSH, Federal, State/Provincial, and Local Jurisdiction Safety Standards shall apply on all sites.**

Jellyfish Filter Vault Components List

The Jellyfish Filter Vault system will arrive on-site with the internal Jellyfish Filter Deck pre-installed, secured, and sealed to a precast riser. The components per the shop drawings (plans) typically include:

- Vault Base Slab or Monolithic Section (dimensions per plans)
- Vault Riser section with Jellyfish Filter Deck, pre-installed (per plans)
- Maintenance Access Wall (MAW) (as needed, per plans)
- Vault Riser sections (as needed, per plans)
- Vault Top Slab (per plans)
- Risers to grade (per plans)
- Rubber connecting boots for inlet/outlet pipes (per plans)
- Frame(s) and Cover(s) or Hatch (per plans)
- Butyl mastic sealant

Contractor Supplied Material

- All Personal Safety Equipment
- Crane and Structure Lifting and Rigging Gear for off-loading and setting
- Grout — Non-shrink grout to connect the inlet/outlet pipe, bring castings to grade, and fill any holes for lifting points
- Inlet and Outlet pipe plugs

Base Preparation

Compact undisturbed sub-grade materials to 95% of maximum density at +/- 2% of optimum moisture content prior to placement of crushed rock. Crushed rock base material shall be six-inch minimum layer of ¾-inch minus rock. Unsuitable material below sub-grade shall be replaced per site engineer's approval.



Setting the Jellyfish Vault

Contractor is responsible to safely rig and unload the Jellyfish Filter structure and associated components. Elevations shall be verified by the Contractor using precise survey techniques.

1. Obtain a copy of the final approved shop drawing and site plan to orient and verify all components are correctly placed. Ensure the inlet(s) and outlet are oriented per the plans.
2. Set the base section of the Jellyfish Filter on solid sub-grade.
3. Verify level and elevation of the base section. Vault floor shall slope 1/4 inch maximum across the width and slope downstream 1 inch per 12 foot of length.
4. Place sealant on each of the precast sections.



Step 2



Step 3



Step 4

5. Set riser section(s) on the base section per approved shop drawings.
6. Verify the outlet pipe invert elevations and confirm pipe is centered.
7. Once the riser section with the Jellyfish Filter Deck has been installed, place the sealant and place the next section, checking to be sure any steps present are correctly aligned.
8. Set Top Slab according to the approved shop drawing.
9. Contractor is responsible for sealing and making all joints, line entry, and exit points watertight, and for sealing any holes used for lift points.



Step 5



Step 8



Step 9

Pipe Connections

Inlet pipe(s) shall be stubbed in and connected to the vault according to Engineer's requirements and specifications. Contractor to grout all inlet pipes flush with or protruding up to 2 inches into interior of vault per plan and specifications.

Outlet pipe shall be stubbed in and connected to the vault according to Engineer's requirements and specifications. Contractor to grout all inlet pipes flush with or protruding up to 2 inches into interior of vault per plan and specifications.

Ballast

When required, the Contractor shall place ballast to the dimensions specified by the Engineer and noted on the plans. Ballast shall not encase the inlet and/or outlet piping and 12-inches of clearance should be provided between the ballast and the inlet/outlet pipes.

Risers, Covers, and Closing the System

The JellyFish Vault is delivered with the necessary risers and covers to bring the unit to grade. It is the contractor's responsibility to assemble the JellyFish Vault per the plans and as directed by the Engineer.

- Place a layer of butyl mastic sealant between the top slab, riser sections, and riser rings
- The top slab should be oriented per the drawing with access openings positioned over steps (if provided)
- Place riser sections and riser rings with steps oriented as shown on plans
- Install the ladder (if provided) per plans
- Install frames and covers per plans

Backfill

Backfill material and placement method should be performed in accordance with the construction plans and specifications and as directed by the Engineer.

Protection the JellyFish from Construction Run-off

The Jellyfish Filter is a Post-Construction Best Management Practice for stormwater treatment and was selected by the Engineer for post-construction stormwater quality treatment. It is the responsibility of the Contractor to ensure appropriate erosion and sediment control (ESC) measures and construction BMPs are in place to protect the Jellyfish Filter from construction runoff, sediment, and other debris until the site is fully stabilized post-construction. Methods to assist in maintaining cleanliness of the Jellyfish Filter during construction:

1. Plug the inlet and outlet of an upstream flow splitter or bypass structure and downstream junction manhole to prevent construction run-off from reaching the Jellyfish Filter.
2. Cartridges shall not be installed until the unit has been fully cleaned, post-construction, and the site stabilized.

The method ultimately selected shall be at the Contractor's discretion and the Contractor's risk, knowing the Jellyfish Filter shall be clean and free of sediment and debris prior to cartridge installation.

Activating the System

Once construction is complete and the site has been fully stabilized (i.e. landscaping is in place, grass growing, and top course of pavement laid), the Jellyfish Filter system can be activated.

Contractor is responsible to inspect and clean the Jellyfish Filter system to keep it clean and free of debris and sediment prior to cartridge installation. The site shall be stabilized (non-erodible soil surfaces) and unit been confirmed to be clean and free of debris prior to cartridge installation and being placed in service for proper operation and performance. This delay avoids the potential of a large rainfall/runoff event that could load (and/or overload) the filters prematurely and shorten the service life for the owner.

Care should be taken in project site-maintenance of erosion control practices and barriers to prevent an influx of sediment that would require vacuum truck maintenance costs prior to commissioning a new system. Even with care, some jobsite debris can enter the Jellyfish Filter system. All debris **MUST** be cleaned from both the top of the Jellyfish Deck and from the sump inside the system **PRIOR** to Cartridge installation. Keeping the system clean is the Contractor's responsibility.

Depending on the methods used to protect the Jellyfish Filter from construction runoff, the Contractor should:

1. Inspect the system to ensure maintenance is not required (refer to the Jellyfish Filter Owner's Manual).
2. Call the number on the Jellyfish cartridge activation kits.
3. Complete and return the activation checklist. Note: Make sure the clean, dry cartridge kits are located near the Jellyfish system and maintenance is conducted, if needed, prior to the activation team's scheduled arrival.
4. Remove all upstream and downstream pipe plugs that were used to prevent construction runoff from reaching the structure. (Standing water should be pumped out and the Contractor shall conform with all confined space requirements prior to entering any underground structure).



© 2024 CONTECH ENGINEERED SOLUTIONS LLC, A QUIKRETE COMPANY
800-338-1122
WWW.CONTECHES.COM

ALL RIGHTS RESERVED. PRINTED IN THE USA.

CONTECH ENGINEERED SOLUTIONS LLC PROVIDES SITE SOLUTIONS FOR THE CIVIL ENGINEERING INDUSTRY. CONTECH'S PORTFOLIO INCLUDES BRIDGES, DRAINAGE, SANITARY SEWER, STORMWATER AND EARTH STABILIZATION PRODUCTS. FOR INFORMATION ON OTHER CONTECH DIVISION OFFERINGS, VISIT CONTECHES.COM OR CALL 800-338-1122.

NOTHING IN THIS CATALOG SHOULD BE CONSTRUED AS A WARRANTY. APPLICATIONS SUGGESTED HEREIN ARE DESCRIBED ONLY TO HELP READERS MAKE THEIR OWN EVALUATIONS AND DECISIONS, AND ARE NEITHER GUARANTEES NOR WARRANTIES OF SUITABILITY FOR ANY APPLICATION. CONTECH MAKES NO WARRANTY WHATSOEVER, EXPRESS OR IMPLIED, RELATED TO THE APPLICATIONS, MATERIALS, COATINGS, OR PRODUCTS DISCUSSED HEREIN. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND ALL IMPLIED WARRANTIES OF FITNESS FOR ANY PARTICULAR PURPOSE ARE DISCLAIMED BY CONTECH. SEE CONTECH'S CONDITIONS OF SALE (AVAILABLE AT WWW.CONTECHES.COM/COS) FOR MORE INFORMATION.

Support

DRAWINGS AND SPECIFICATIONS ARE AVAILABLE AT WWW.CONTECHES.COM

JF Vault Install Guide 11/2024