

Aluminum Structural Pipe Round and Ellipse Assembly & Installation Guide





Aluminum Structural Pipe (ALSP) Round and Ellipse Assembly & Installation Guide

Table of Contents

ASSEMBLY

Introduction	2
Safety Instructions	3
Suggested Tools	4
Standard Plate Details.....	5
Fasteners and Sample Drawings	6
Storage and General Assembly Instructions.....	7
Assembly Instructions for Round and Ellipse Structures	10
End View Orientations	15
Assembly Considerations and Spiraling	16
Lifting	17

INSTALLATION

Installation	18
Foundations.....	19
Backfill and Compaction.....	21
Compaction Equipment	24
Summary	26

Note to Contractor:

If at any time you have any questions, please don't hesitate to call the Winchester Plant Technical Services Team at 859-744-3339 for assistance.

Introduction

AS WITH ANY INSTRUCTIONS, PLEASE READ THROUGH THIS INFORMATION COMPLETELY BEFORE ATTEMPTING ANY FIELD WORK OR ASSEMBLY.

The following is a guideline for the assembly and installation of a Contech Aluminum Structural Plate (ALSP) structure. Prior to assembly, reference any assembly drawings provided, these guidelines, the Structural Plate Design Guide and the engineer's plans and specifications.

For each different structure shipped to the job site, a copy of the assembly drawings, the bill of materials (BOM) and these instructions are enclosed in a keg with a color coded lid. If the order calls for two or more identical structures, only one drawing will be furnished. The drawings provide the specific plate layout for each structure and must be used to guide assembly.

Safety Instructions

Review these instructions with your supervisors and crews. It is our intent you have a safe and successful project for you and your customer. Anytime a question or problem arises, contact your Contech representative before you proceed.

NOTICE: PRIOR TO ASSEMBLY, REFERENCE THE ENGINEER'S PROJECT PLANS AND SPECIFICATIONS. DURING ASSEMBLY AND INSTALLATION, ALL OSHA SAFETY REGULATIONS SHALL BE OBSERVED.

 **This safety alert symbol indicates important safety messages. When you see this symbol, be alert to the possibility of personal injury, and be sure you understand the message that follows.**

TERMS YOU SHOULD KNOW

 **WARNING** Alerts you to hazards or unsafe practices that **CAN result in severe personal injury or property damage.**

 **SAFETY INSTRUCTIONS** Messages about procedures or actions that must be followed for safe handling of ALSP.

 **WARNING** **Falling plates and accessories can cause severe personal injury or death. Read and follow all safety instructions before unloading ALSP and accessories.**

UNLOADING AND HANDLING

Plates and fasteners are typically shipped in bundles which may weigh up to 5,000 lbs. The bundles should always be unloaded with the "outside" of the plate up. If the bundles are improperly unloaded; such as upside down, on their sides, or pushed off the truck; the plates may be damaged and/or difficult to separate. Damaged plates may cause unnecessary work for the assembly crew. See the Bill of Materials for individual plate weights. The following equipment is recommended for unloading ALSP and accessories:

- Forklift
- Front-end loader with fork adapters
- Backhoe with fork adapters
- Cranes
- Non-metallic slings

Other unloading methods such as chains, wire rope, cinching, or hooks in the end of the bundles should not be used.

Failure to follow these instructions can result in serious injury, death and /or damage to ALSP and accessories.

1. Only trained and authorized equipment operators are to be permitted to unload the ALSP and accessories.
2. Wear approved safety hat and shoes, gloves, and eye protection.
3. Park the truck and trailer on level ground before unloading.
4. Keep all unauthorized persons clear of the area when the driver releases the binders from the trailer and during unloading.
5. Do not cut the aluminum strapping around the bundles until the bundles have been placed on level ground or secured, and will not be moved again as a unit. It is recommended that the aluminum strapping be cut with appropriate sized cutting tools. Stand to the side when cutting a strap. Always be aware that ALSP and accessories may move, roll, or fall when a strap is cut.

6. Do not lift bundles by the steel strapping around the bundles. 

7. Know the capabilities and rated load capacities of your lifting equipment. Never exceed them.

8. Do not stand or ride on the load of ALSP and accessories while it is being unloaded. Do not stand near the ALSP and accessories while they are being unloaded. 

9. If unloading at multiple site locations, make sure the truck driver secures the remaining load before proceeding to the next location.

10. The contractor shall be responsible for the safety of his/her employees and agents. Adequate safety indoctrination is his responsibility.
11. Safe practices on construction work as outlined in the latest edition of the "Manual of Accident Prevention in Construction," published by The Associated General Contractors, shall be used as a guide and observed.
12. The contractor shall comply with all applicable city, state, and federal safety codes in effect in the area where he is performing the work. This conformance shall include the provision of the current issue of the "OSHA Safety and Health Standards (29 CFR 1926/1910)" as published by the U.S. Department of Labor.

ASSEMBLY AND INSTALLATION

1. Contech recommends using non-metallic slings for lifting assembled ALSP structures.
2. Chains with clevises may be used to handle the plates and accessories, being careful to not cause damage.
3. Do not push bundles off the trailers or permit plates and accessories to drop to the ground.
4. Prior to assembly, review and understand the engineer's project plans and specifications. Quality control is the responsibility of the contractor unless otherwise provided for in the contract documents.
5. Thoroughly review and study the product catalog, assembly instructions, assembly drawings, and bill of material prepared for your order and enclosed by Contech with the shipment.
6. Observe all OSHA safety regulations and guidelines during assembly and installation.

7. During and prior to the construction of permanent erosion control and end treatment protection, special precautions may be necessary to avoid damage.

8. The maximum allowable live loads and dead loads are those specified by the project engineer. The structure must be protected from unbalanced loads and from any structural loads or hydraulic forces that might bend or distort the structure. Flotation of the structure must be prevented.

 **Notwithstanding the instructions contained in this guide, it is the responsibility of the consignee or consignee's agent to devise safe unloading and handling procedures.**

STORAGE

When aluminum bundles are exposed to moisture for extended time periods, a wet storage stain may occur. The purchaser should use reasonable handling and storage procedures for the materials to assure that a stain-free product is installed. See page 7 for more information.

ASSEMBLY

Suggested Tool List

- ☑ Band Cutters to cut packaging bands around bundled material.
- ☑ Lifting devices, such as cables/chains with safety hooks or Clevis for moving individual plates.
- ☑ 3 lb. Engineer's Hammer, Lifting Hook, and Pry bar.
- ☑ Tapered Drive Pin or Drift Pins for use in positioning plates, sheets, components or sections of material. The preferred material is tempered steel bar stock.
- ☑ Spud Wrench and/or Socket Wrench with appropriate sockets.
- ☑ Metered Torque Wrench. Many projects require verification of the bolt torque.
- ☑ Come-along for use in pulling the plates, sheets, components, or sections together (if required).
- ☑ 7/8" reamer bit and 1 1/4" socket.
- ☑ Generator or air compressor for fasteners.
- ☑ Power source (air or electric).
- ☑ Air hose. Universal quick-fit fittings are found on most compressors.
- ☑ Electric extension cords with proper ground provisions and adequate wire gage.
- ☑ Air/electric impact wrench with adequate capacity for the torque ranges as noted. Torque levels are for installation, not residual, in-service requirements.
- ☑ Scaffolding and/or Ladders for larger structures as needed.

Note: Cordless tools are not recommended.



ALSP Tools



Unloading Plate Bundles



Fastener Kegs



Completing the Final Ring




Sequential Ring Assembly

Standard Plate Details


TABLE 1. DETAILS OF UNCURVED ALSP PLATE

Plate "N"	Net Width (Inches)	Gross Width (Inches)	Plate Thickness (Inches)					
			Weight per Plate, lbs (without fasteners)					
			0.125	0.150	0.175	0.200	0.225	0.250
8	77-0	81-3/4	66	79	92	105	119	132
9	86-5/8	91-3/8	74	88	103	118	133	148
10	96-1/4	101-0	81	98	114	130	147	164
11	105-7/8	110-5/8	89	107	125	143	161	179
12	115-1/2	120-1/4	97	116	136	155	175	195
13	125-1/8	129-7/8	105	126	147	168	189	210
14	134-3/4	139-1/2	113	135	157	180	203	226
15	144-3/8	149-1/8	120	144	168	192	217	241
16	154-0	158-3/4	128	154	179	205	231	257
17	163-5/8	168-3/8	136	163	190	217	245	273
18	173-1/4	178-0	144	172	201	230	259	288
19	182-7/8	187-5/8	151	182	212	242	273	304
20	192-1/2	197-1/4	159	191	223	254	288	319

For ALSP, 1 N = 9.625"

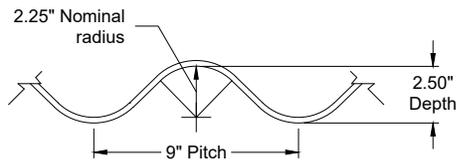

9" x 2-1/2" Corrugation

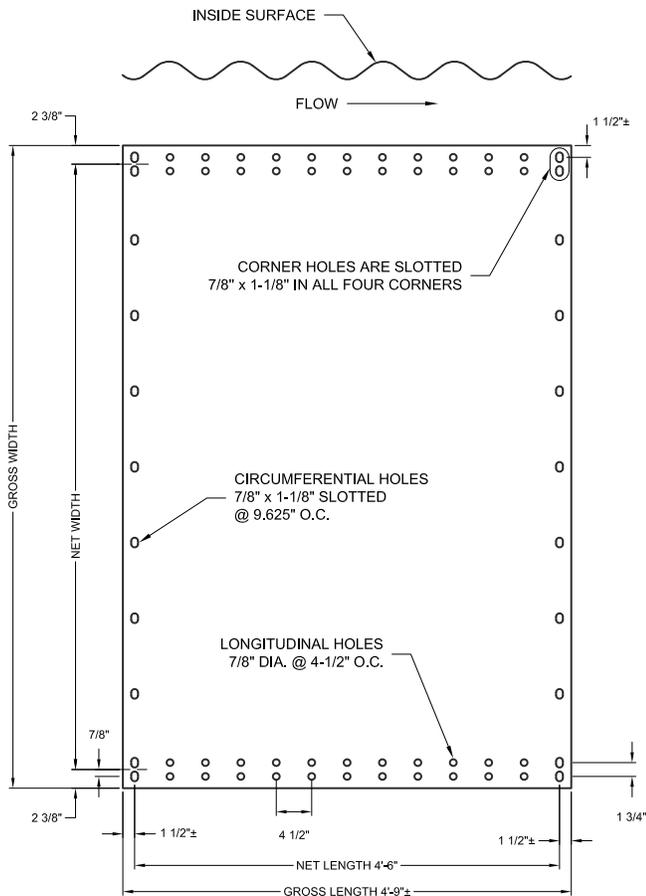

Standard Plate Detail

PLATE LENGTH (LONGITUDINAL)

All standard plates have a net length of 4.5'. Longitudinal bolt holes at 4.5" centers provide a standard 5.33 bolts per foot of longitudinal seams in two parallel rows at 1.75" centers. The outside crest of the end corrugations are punched for circumferential seam holes on centers of 9.625" (1N).

PLATE WIDTH (CIRCUMFERENTIAL)

Individual circumferential plate widths are noted in terms of N (N = 9.625" or 3 pi). Standard plates are fabricated in net widths of one "N" increments from: 8N (77.00") through 20N (192.50").

The N nomenclature translates circumference directly into nominal diameter in inches. For example, two 10N plates give a diameter of 60" (2 x 10N x 3 pi), three 12N plates = 108" (3 x 12N x 3 pi), etc. Various plate lengths are used to obtain a specific structure shape and size.


The various lengths of plates are assembled or placed in the structure in accordance with the assembly drawing (plate layout drawing furnished by CONTECH). The letters appearing in the stencil data, on the "inside" of the plate, designate the full uncut plates to be assembled. All lettered plates are interchangeable and may be placed in any location requiring plates of that letter.

The plates are marked to identify the following:

9565572- Order number

1/107 - BOM Item number

MK6-Plate mark number

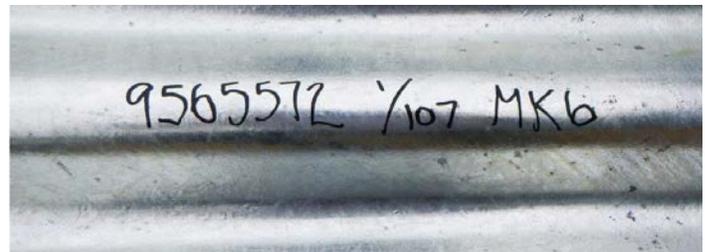

CONTECH ALUM. 5052 H141 PER ASTM B-746 AASHTO M219
ALERIS 42/269 6070 01 03 21 125

- CONTECH – Manufacturer name
- ALERIS – Supplier name
- ALUM. 5052 – Alloy
- 42/269 6070 01 03 21 – Material heat number (may vary by supplier)
- H141 – Material temper
- 125 – Material thickness (inches) specifications
- ASTM B-746 AASHTO M219 – Material specifications

ALSP Bolts and Nuts

3/4" diameter hot-dipped galvanized steel (specially heat-treated) bolts meeting ASTM A307 or A449 specifications with suitable nuts are used to assemble ALSP. Aluminum fasteners are available for salt water installations and are provided upon request. Contact your local Contech representative.

The underside of the bolt head is uniformly rounded and ribbed to prevent bolt head rotation while tightening. Unlike conventional bolts, once the nut is finger tight, final tightening can typically be accomplished by one worker with an air driven impact wrench to 100-150 ft.-lbs. of torque.

In addition, one side of the nut is spherically formed to help align and center the fastener into the punched holes. The rounded side shall be placed against the structure.

TABLE 3. TYPICAL BOLT AND NUT				
Diameter (Inches)	A (Inches)	B (Inches)	C (Inches)	D (Inches)
3/4	1 1/4	9/16	13/16	1 7/16


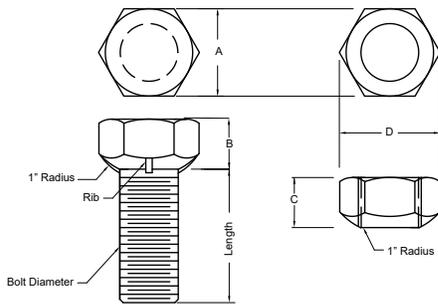


TABLE 2. BOLT LENGTH AND USAGE				
3/4" Diameter Bolt Lengths (Plate Only)				
Plate Thickness (Inches)	1 Plate	2 Plate Lap	3 Plate Lap	4 Plate Lap
0.125	N/A	1 1/4"	1 1/4"	1 1/4"
0.150-0.200	N/A	1 1/4"	1 1/2"	2"
0.225-0.250	N/A	1 1/2"	2"	N/A
3/4" Diameter Bolt Lengths (with Reinforcing Rib, if Required)				
Plate Thickness (Inches)	1 Plate	2 Plate Lap	3 Plate Lap	4 Plate Lap
0.125-0.175	1 1/4"	1 1/2"	2"	2"
0.200-0.250	1 1/2"	2"	2"	2"

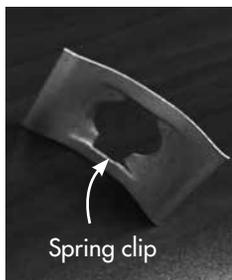

BOLTS

Bolts are furnished in three lengths, 1-1/4", 1-1/2" and 2". To determine the approximate number of bolts for a structure, check the PLD and the BOM. All containers are stenciled with the individual bolt size. Note: Always place the rounded side of the nut in contact with the plates.


BOLTING

Bolting procedures may vary depending on the size and gage of the structure. Generally speaking, on smaller diameter lighter gage structures, a loose bolting procedure works best. On larger heavier gage structures, a tight bolting procedure, ring to ring may provide better results. The assembly contractor should use the procedure best suited for his particular project based on his experience.


To facilitate alignment, initial assembly should be done with a minimum number of bolts. Insert sufficient bolts in each seam to hold the plates in position, but do not tighten the nuts, thus leaving the plate free to move slightly to help in matching the remaining bolt holes. Bolting the circumferential seam is best done by first placing bolts near the middle of the plate. About three rings behind plate assembly, insert the remaining bolts, using pins or a pry bar to align holes. After all the bolts are in place, tighten the nuts. Note, aligning of bolt holes is done easier when bolts are loose while drifting of holes is best done with adjacent bolts tight.

Sometimes it is desirable to insert and tighten all of the bottom plate bolts as the bottom is assembled. If this is done, be certain that the plates are properly aligned before tightening the bolts. Always assemble the side and top plates with as few bolts as possible while assembling the structure.

Typical Bolt and Nut

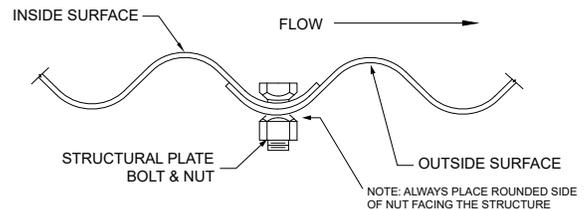


SHELL ONLY

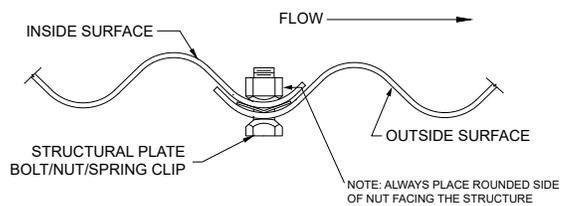

INVERT ONLY

Sample Drawing

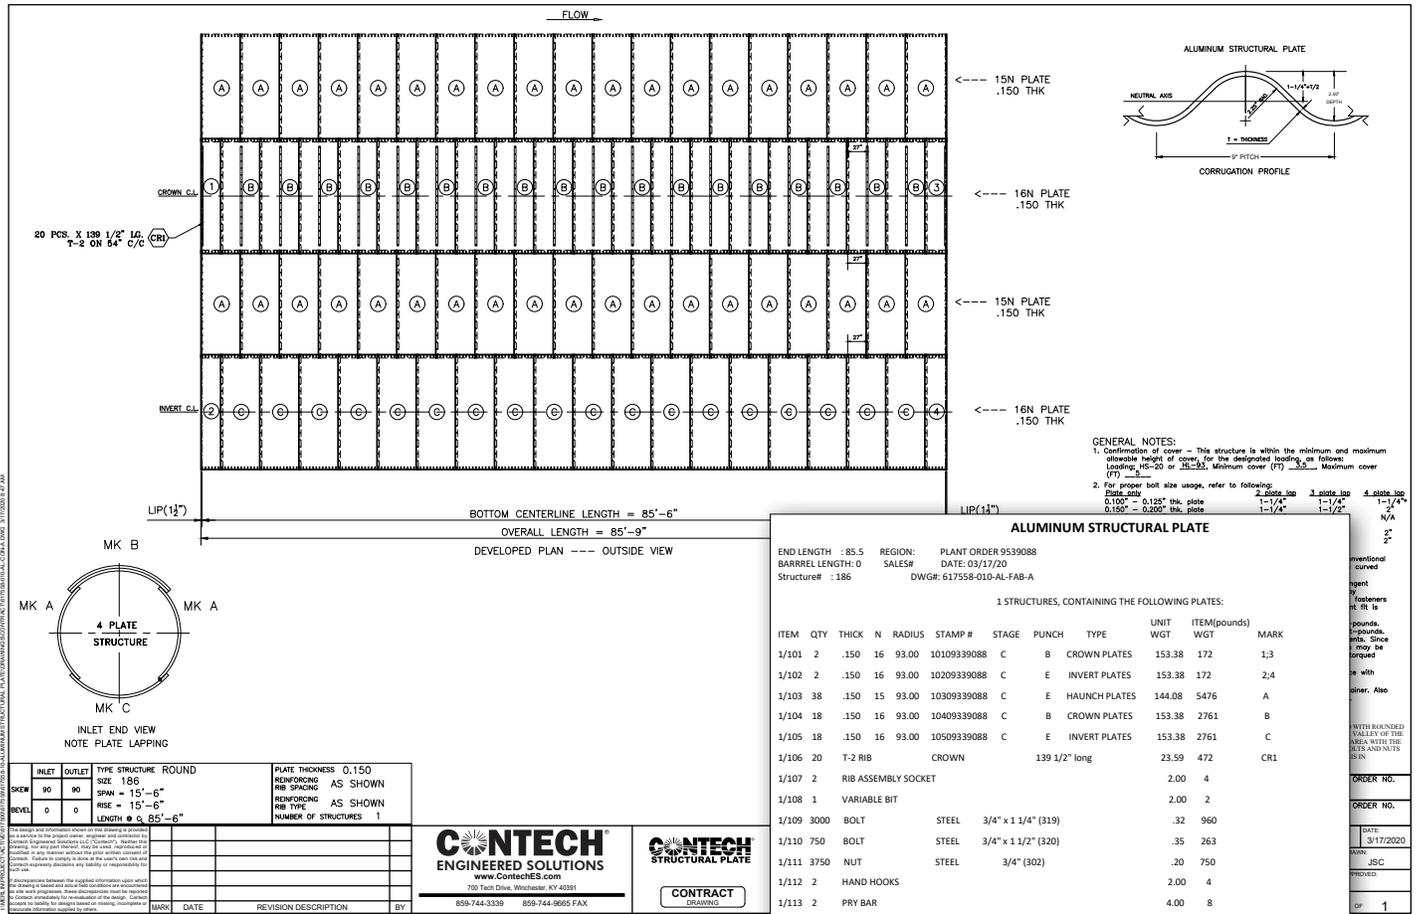

Example Plate Layout Drawing from Contract Set

Example Bill of Material (BOM)



Completing the Final Ring



Preparation of End Treatment

ALSP General Assembly Instructions

PLANNING BEFORE ASSEMBLY

It is important for you to know the jobsite conditions, be familiar with the materials, and understand the plans and specifications. Necessary arrangements and preparations including those suggested below should be made before the assembly crew moves onto the project. This should save time and expedite assembly.

STORAGE

The purchaser should use reasonable handling and storage procedures for the materials at the construction site to assure that a stain-free product is installed.

When relatively long outdoor storage is necessary, plates should be raised from the ground and separated with strip spacers to provide free access of air to all parts of the surface. They also should be inclined in a manner which will give maximum drainage. The material should also be stored under cover whenever possible. Bolts and nuts should be stored inside and periodically checked to ensure that the containers are free from moisture or condensation.

ASSEMBLY CONSIDERATIONS

1. The staging area needed must be fairly flat, free of large brush, stumps, or trees and as close to the installation site as possible. In those cases where there are no level places to assemble the structure, make arrangements to level an area for staging. The assembly area required for all two or three-plate structures is a width of $[2 \times (\text{Span}) + 15']$ by the length of the structure.

The assembly area for all four and five-plate structures is a width of $[(\text{Span}) + 15']$ by the length of the structure. These structures are not moved or turned during the assembly procedure. The extra 15', in either case, is needed to layout plates and to provide the necessary working area.

2. Because aluminum is lightweight, the assembled structure can often be lifted with light-duty equipment. See the Structural Plate BOM or contact a Contech representative for the handling weight of the structure. It may be advantageous to preassemble the structure. For example, removing the existing bridge and preparing the foundations while the structure is being assembled may be the most effective approach to the project. Two and four plate arch structures have a double row of bolts (longitudinal seam) in the top. This double row of bolts in the top of the culvert makes preassembly sometimes easier than assembly in place. (Reference the section on Lifting.) See the Bill of Materials, the Structural Plate Design Guide or a Contech representative for the handling weight of the structure.

CREW SIZE

Crew size can vary from three to six men. A four-man crew is generally the most efficient. Five and six-man crews are generally used only when time is a critical factor in assembling the structure. A three-man crew is usually inefficient since it is more efficient to work in pairs.

TOOLS REQUIRED

Reference the "Suggested Tool List" on page 4.

DESCRIPTION OF MATERIAL


The marked bolt container will contain the bill of materials (BOM) and a drawing set which will have a plan view of the structure, showing the inside surface as if it were laid out flat.

The various lengths of cut (e.g. 1, 2, 3, etc.) and uncut plates are assembled or placed in the structure in accordance with the assembly drawing (plate layout drawing furnished by Contech). All cut plates or otherwise altered plates (such as plates with hook bolt holes) will have mark numbers painted on the outside surface of the plate. If the cut plates are too narrow, a wired tag will contain the required stencil data. The plate numbers will coincide with mark numbers shown on the assembly drawings. Standard plates (A, B, C, etc.) will not be marked.

Normally, all of the plates in the barrel of the structure are not shown on the assembly drawing. However, enough of the plates are shown to establish the proper seam stagger and a repetitive pattern in the barrel. This pattern establishes the correct location for all of the plates. The plates must be oriented such that their location matches that shown on the assembly drawing. Should it prove difficult to match the plate and the assembly drawing, a Contech representative should be notified for assistance.

ALSP corrugations of 9-inch pitch and 2.5-inch depth are perpendicular to the length of each plate. Standard specified thickness of the plates vary from 0.100 inches through 0.250 inches in uniform increments of 0.025". Uncurved plates are available in 0.100" plate thickness only.

All plates and ribs are shipped to the jobsite prepunched and curved in strapped nestable bundles. Each bundle will contain only plates or ribs having the same curvature. Unloading plate and rib bundles off the truck should be planned accordingly. The bundles should always be unloaded with the "outside" of the plate up. If the bundles are improperly unloaded; such as upside down, on their sides, or pushed off the truck; the plates may be damaged and/or difficult to separate. Damaged plates may cause unnecessary work for the assembly crew.

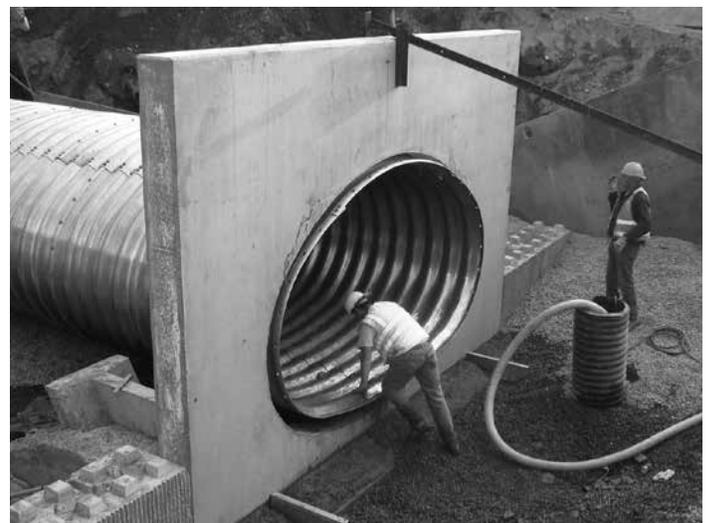

Reinforcing Ribs

When circumferential ribs are used with Aluminum Structural Plate, they reinforce the structure to reduce minimum cover and provide additional stiffness. These circumferential ribs are bolted to the structure's crown and haunches (if applicable) at spacings of 9", 18", 27" or 54" centers through pre-punched holes in both the ribs and the structural plate. Reference your project assembly drawings. A Rib Assembly Socket is provided by Contech on structures that utilize ribs. This socket is manufactured with a 3/4" drive.




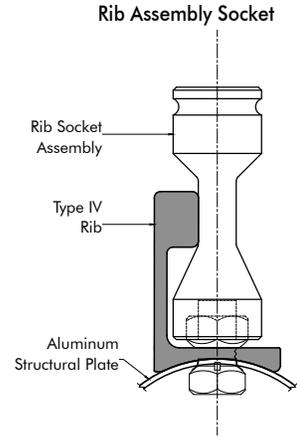


TABLE 2. ADDED HANDLING WEIGHT AND ADDITIONAL BOLTS PER FOOT OF STRUCTURE FOR TYPE II REINFORCING RIB									
Total N of Rib	9" o.c.		18" o.c.		27" o.c.		54" o.c.		
	Wt./Ft.	Bolts/ft	Wt./Ft.	Bolts/Ft.	Wt./Ft.	Bolts/Ft.	Wt./Ft.	Bolts/Ft.	
5	15.7	7.3	7.7	3.3	5.0	2.0	2.3	0.7	
6	18.6	8.6	9.1	3.9	5.9	2.3	2.7	0.8	
7	21.5	9.8	10.5	4.4	6.8	2.7	3.2	0.9	
8	24.3	11.0	11.9	5.0	7.7	3.0	3.6	1.0	
9	27.2	12.2	13.3	5.6	8.7	3.3	4.0	1.1	
10	30.1	13.4	14.7	6.1	9.6	3.7	4.5	1.2	
11	32.9	14.7	16.1	6.7	10.5	4.0	4.9	1.3	
12	35.8	15.9	17.5	7.2	11.4	4.3	5.3	1.4	
13	38.7	17.1	18.9	7.8	12.3	4.7	5.7	1.6	
14	41.5	18.3	20.3	8.3	13.2	5.0	6.2	1.7	
15	44.4	19.6	21.7	8.9	14.2	5.3	6.6	1.8	
16	47.3	20.8	23.1	9.4	15.1	5.7	7.0	1.9	
17	50.2	22.0	24.5	10.0	16.0	6.0	7.4	2.0	

TABLE 3. ADDED HANDLING WEIGHT AND ADDITIONAL BOLTS PER FOOT OF STRUCTURE FOR TYPE IV REINFORCING RIB									
Total N of Rib	9" o.c.		18" o.c.		27" o.c.		54" o.c.		
	Wt./Ft.	Bolts/ft	Wt./Ft.	Bolts/Ft.	Wt./Ft.	Bolts/Ft.	Wt./Ft.	Bolts/Ft.	
5	20.0	7.3	9.8	3.3	6.4	2.0	3.0	0.7	
6	23.7	8.6	11.6	3.9	7.6	2.3	3.6	0.8	
7	27.4	9.8	13.4	4.4	8.8	2.7	4.2	0.9	
8	31.0	11.0	15.2	5.0	10.0	3.0	4.7	1.0	
9	34.7	12.2	17.1	5.6	11.2	3.3	5.3	1.1	
10	38.4	13.4	18.9	6.1	12.4	3.7	5.9	1.2	
11	42.1	14.7	20.7	6.7	13.5	4.0	6.4	1.3	
12	45.8	15.9	22.5	7.2	14.7	4.3	7.0	1.4	
13	49.4	17.1	24.3	7.8	15.9	4.7	7.5	1.6	
14	53.1	18.3	26.1	8.3	17.1	5.0	8.1	1.7	
15	56.8	19.6	27.9	8.9	18.3	5.3	8.7	1.8	
16	60.5	20.8	29.7	9.4	19.5	5.7	9.2	1.9	
17	64.1	22.0	31.5	10.0	20.7	6.0	9.8	2.0	

TABLE 4. ADDED HANDLING WEIGHT AND ADDITIONAL BOLTS PER FOOT OF STRUCTURE FOR TYPE VI REINFORCING RIB									
Total N of Rib	9" o.c.		18" o.c.		27" o.c.		54" o.c.		
	Wt./Ft.	Bolts/ft	Wt./Ft.	Bolts/Ft.	Wt./Ft.	Bolts/Ft.	Wt./Ft.	Bolts/Ft.	
5	28.8	7.3	14.2	3.3	9.4	2.0	4.5	0.7	
6	34.1	8.6	16.9	3.9	11.1	2.3	5.3	0.8	
7	39.4	9.8	19.5	4.4	12.8	2.7	6.2	0.9	
8	44.8	11.0	22.1	5.0	14.6	3.0	7.0	1.0	
9	50.1	12.2	24.7	5.6	16.3	3.3	7.8	1.1	
10	55.4	13.4	27.4	6.1	18.0	3.7	8.7	1.2	
11	60.8	14.7	30.0	6.7	19.8	4.0	9.5	1.3	
12	66.1	15.9	32.7	7.2	21.5	4.3	10.4	1.4	
13	71.4	17.1	35.3	7.8	23.2	4.7	11.2	1.6	
14	76.8	18.3	37.9	8.3	25.0	5.0	12.0	1.7	
15	82.1	19.6	40.6	8.9	26.7	5.3	12.9	1.8	
16	87.4	20.8	43.2	9.4	28.5	5.7	13.7	1.9	
17	92.8	22.0	45.8	10.0	30.2	6.0	14.5	2.0	

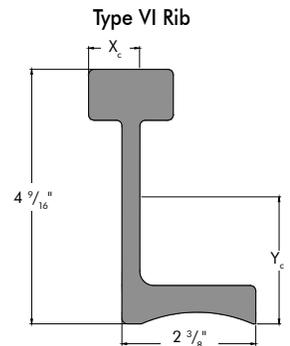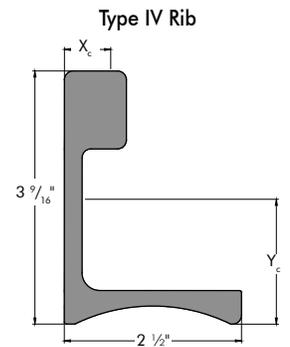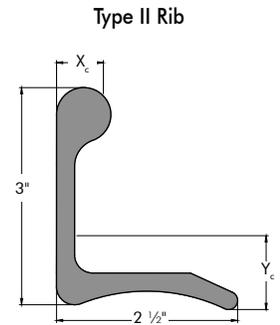

- Notes:
1. Bolts and nuts are included in the tables above.
 2. For Total N of rib on a structure, see the plate layout drawing and BOM.

Reinforcing Ribs, cont.


STRUCTURES WITH REINFORCING RIBS

Assembly methods of ribbed structures follow those of non-ribbed structural plate products. All ribs are marked with numbers corresponding to the assembly drawing. Reinforcing ribs are spaced at 9", 18", 27" or 54" depending on the design of the structure. Follow the assembly drawing in placing a specific rib in its proper place on the structure. All reinforcing ribs must be oriented the same with respect to the vertical leg of the rib.

When assembling the crown and/or side plates, it is best to temporarily place one or two bolts in the ends of the circumferential seam before attaching a rib. Use the drift pin to line up and hold together the overlapping plates and the rib before bolts are placed.

Check to make sure that no holes remain in the structure.


Tighten and torque all bolts and finally any remaining plate seams. Bolt torque requirements are 100-150 ft-lbs for all plate thicknesses and components. **Do not over torque; a good plate fit is far better than high torque.**

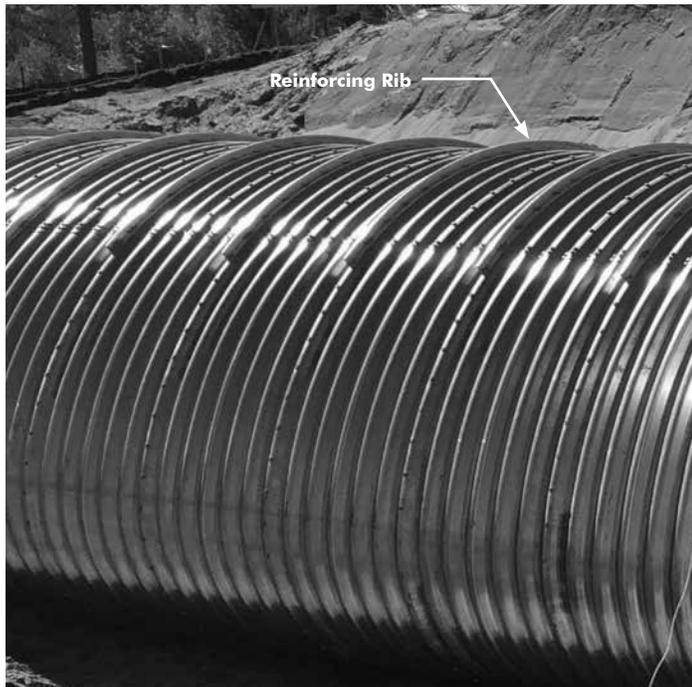

Assembly Instructions for ALSP Round & Elliptical Structures


PLATE ASSEMBLY

The various widths of plates are positioned in accordance with the plate layout drawings furnished with the structure. The numbers shown on the drawing indicate the plate width, "N" value and plate thickness. Please reference table on page 5 of this document.

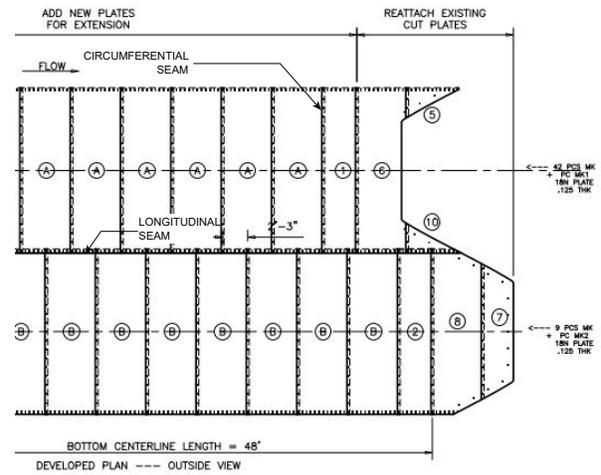

The beginning and end rings for square end structures contain a combination of full length plates and short plates to close a ring and obtain the proper plate stagger. Special plates in cut end structures are shown on the plate layout together with the necessary standard 4.5' long plates required to obtain proper seam stagger in the barrel. Barrel rings in the circumferential direction contain plates of all the same length (4.5').


For cut plates (example 1, 2, etc...), elbow cut and welded plates (example 3L, 3R, etc...), the numbers that appear on the plate layout drawing correspond to the numbers on the plates. Reference the structure assembly drawings furnished with the order. Please refer to page 14 for proper end view orientation for the plate configurations described below.

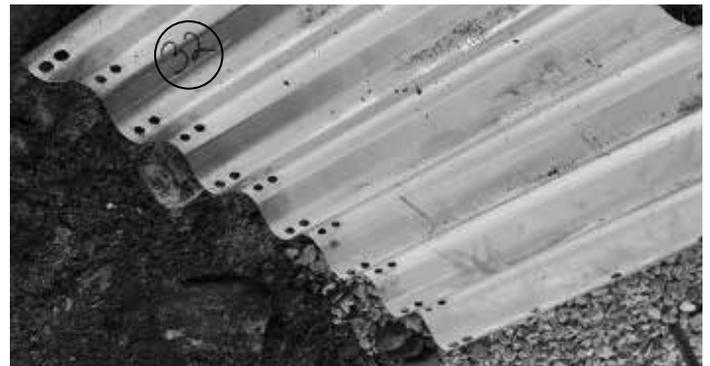

Two-Plate Structures

ASSEMBLY PROCEDURE FOR TWO-PLATE ROUND & ELLIPTICAL

Two-plate structures have an invert plate and a crown plate. For the purpose of illustration and sequence, you will see numbers in squares on this drawing. These numbers relate to the numbers in parenthesis on the text below and are meant to represent the sequence in which the plates are recommended to be assembled. The markings in squares will not be shown on your assembly drawings, nor will they be marked on the individual plates. The numbers and letters in circles, on the drawings, represent the mark numbers on the plates. These numbers will be marked on the plates and shown on the drawings and bill of materials.

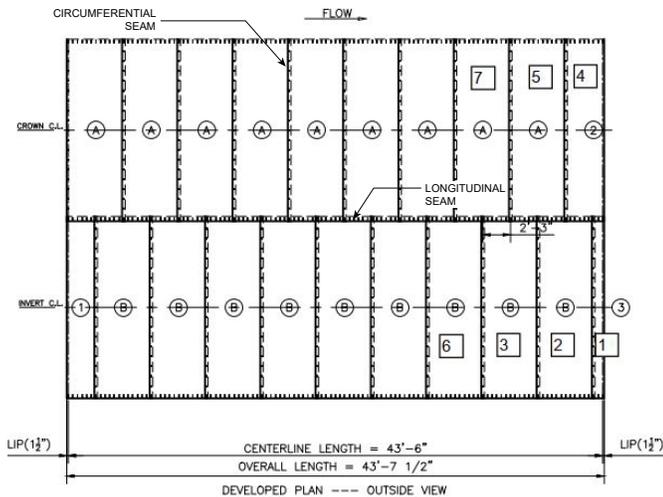

Lay out the two rows of plates, invert and crown, with applicable cut plates on the upstream end and the downstream ends of the structure as shown in the assembly drawing.

Plates should be assembled starting at the downstream or outlet end of the structure so that the plates shingle properly for water flow. This will establish the plate stagger. Refer to the End View detail on page 15 for proper lapping of these seams and pay close attention to the longitudinal offset (stagger, usually 27") of the invert plates versus the crown plates.

Bolt (lightly torqued) the first invert plate (1) to the second invert plate (2) through the circumferential seam bolt holes, starting with the center bolt first and working both ways towards each longitudinal seam.

Repeat this step with the next invert plate (3). Be sure to lap the plates as shown on the details on page 8. Assemble the invert by placing bolts from underneath using the spring clips provided, working from the center to the ends of the invert plates. Once adequate clearance is achieved, bolts can be inserted from the inside and tightened on the outside of the structure. Leave the last hole before the longitudinal seam open to be able to use drift pins for help in the alignment, if needed. This technique should be applied on all circumferential seams.

Add the first crown plate (4) to close the first ring. Then add the second crown plate (5). After the plates are bolted together the bolts may be tightened, but do not tighten the circumferential bolt next to the longitudinal seam. Tightening this bolt will lose all the flexibility in the triple laps (to be discussed later). Waiting until the completed structure is lightly torqued together before final tightening may provide extra flexibility in the total assembly of the structure. Insert the last bolt from the previous ring that was left opened. Keeping a drift pin in place may assist with tightening bolts that are nearby.

Continue this technique as you move upstream. Assemble the structure, with the leading invert plate (6) being placed ahead of the trailing crown plate (7) on the top. Add the upstream or inlet end plates to complete the assembly. Please keep in mind the lapping of the plates when assembling this last ring.

As you are building the structure, temporarily leave out the bolts at the corner of the plates where the circumferential seam and longitudinal seams meet to be able to use a drift pin in the alignment, if needed. After you align the plates, remove the drift pin and insert the bolts. At triple plate laps, use the longer bolts. Always pin from the side of the plate that was just lapped and pull at perpendicular angles.


After the structure is lightly torqued, proceed to tighten and fully torque all the bolts. Bolt torque requirements are 100-150 ft-lbs for all plate thicknesses and components. Make sure that any gaps are minimal, before final torque. **Do not over torque; a good plate fit is far better than high torque.**



Three-Plate Structures

ASSEMBLY PROCEDURE FOR THREE-PLATE ROUND & ELLIPTICAL

For the purpose of illustration and sequence, you will see numbers in squares on this drawing. These numbers relate to the numbers in parenthesis on the text below and are meant to represent the sequence in which the plates are recommended to be assembled. The markings in squares will not be shown on your assembly drawings, nor will they be marked on the individual plates. The numbers and letters in circles, on the drawings, represent the mark numbers on the plates. These numbers will be marked on the plates and shown on the drawings and bill of materials.

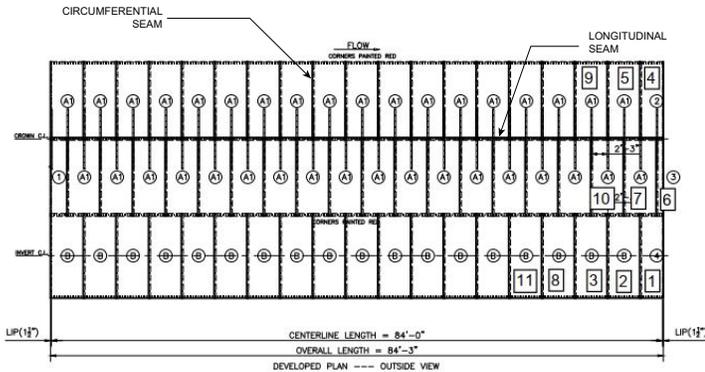

Three-plate round and ellipse structures have one invert and two side plates. Plates may have color markings on them. A red color marking indicates the end of the plate that will attach to the invert plate; a blue color marking indicates the end of the plate that will attach to the crown. There may be as many as six cut plates; three on the upstream end and three on the downstream end. Refer to the project specific assembly drawing.

Lay out the invert plates using mark "B" plates with the appropriate cut plates, as shown on the assembly drawings. Then lay out the side plates using mark "A" plates on each side of the invert plates. Refer to the End View detail on page 15 for proper lapping of these seams, and pay close attention to the longitudinal offsets of one side versus the other side.

Beginning at the downstream or outlet end, start by placing the first invert plate (1), at line and grade and ensure that it stays in place. Place the next full invert plate (2) on top of the cut plate (1), and bolt (lightly torque) the circumferential bolts, but do not place bolts on the longitudinal seam. Place a third full invert plate (3) on top of the second invert plate (2). See the details of the longitudinal lapping on page 8. The spring clips provided should be utilized in the bottom circumferential seams, where the plates for the next ring will be attached.

Assemble the invert by placing bolts from underneath the invert and working from the center to the ends of the circumferential seam. Place all the bolts, except for the last bolt hole. Leave the last hole, where the circumferential and longitudinal seams meet, at the longitudinal seam open to be able to use drift pins for help in the alignment, if needed. This technique should be applied on all circumferential seams. The first few bolts up from the bottom centerline of the circumferential seam should be placed from the outside. The rest of the bolts may be placed from the inside. This will make tightening the bolts easier

After these invert plates are bolted and tightened, starting at the downstream or outlet end, place the cut side plate (4) and uncut side plate (5), on one side of the invert. The side plates will go inside of the invert plate. First bolt (lightly torque) the invert's longitudinal seam at the downstream end, then bolt (lightly torque) the triple plate lap at the side plate circumferential seam. After the longitudinal seam is bolted (lightly torqued), place the bolts in the circumferential seam working from the bottom to the top.



Connect the other side cut plate (6) and uncut plate (7) on the inside of the invert plates and on the outside of the opposite side plates. First bolt (lightly torque) the invert's longitudinal seam at the downstream end, then bolt (lightly torque) the triple plate lap at the side plate circumferential seam. After the longitudinal seam is bolted (lightly torqued), place the bolts in the circumferential seam working from the bottom to the top.

Bolt (lightly torque) the longitudinal seam at the crown. To reach this height, you may need to use a lift or scaffolding inside of the structure. Continue assembly in the sequence as marked in the above sample drawing, with the invert plates always leading the side plates. Repeat the steps above, and add the upstream or inlet end plates to complete the assembly.

As you are building the structure, temporarily leave out the bolts at the corner of the plates where the circumferential seam and longitudinal seams meet to be able to use a drift pin in the alignment, if needed. After you align the plates, remove the drift pin and insert the bolts. At triple plate laps, use the longer bolts. Always pin from the side of the plate that was just lapped and pull at perpendicular angles.

Bolt any remaining triple plate laps and place any remaining bolts as needed. Then torque all bolts. Bolt torque requirements are 100-150 ft-lbs. for all plate thicknesses and components. **Do not over torque; a good plate fit is far better than high torque.**

Four-Plate Structures

ASSEMBLY PROCEDURE FOR FOUR-PLATE ROUND & ELLIPTICAL

For the purpose of illustration and sequence, you will see numbers in squares on this drawing. These numbers relate to the numbers in parenthesis on the text below and are meant to represent the sequence in which the plates are recommended to be assembled. The markings in squares will not be shown on your assembly drawings, nor will they be marked on the individual plates. The numbers and letters in circles, on the drawings, represent the mark numbers on the plates. These numbers will be marked on the plates and shown on the drawings and bill of materials.


Four-plate structures have an invert plate, two side plates, and a crown plate. Plates may have color markings on them. A red color marking indicates the end of the side plate that will attach to the invert plate; a blue color marking indicates the end of the side plate that will attach at the crown. There may be as many as eight cut plates; four on the upstream end and four on the downstream end. Refer to the assembly drawing.

Lay out the invert plates using mark "C" plates with the cut plates on opposite ends per the assembly drawings. Refer to the End View detail on page 14 for proper lapping of these seams, and pay close attention to the longitudinal offset (stagger, usually 27") of one side versus the other side.

Beginning at the downstream or outlet end, start by placing the first invert plate (1), at line and grade and ensure that it stays in place. Place the next full invert plate (2) on top of the cut plate (1), and bolt (lightly torque) the circumferential bolts, but do not place bolts on the longitudinal seam. Place a third full invert plate (3) on top of the second invert plate (2). See the detail of the longitudinal lapping on page 8. The spring clips provided should be utilized in the bottom circumferential seams, where the plates for the next ring will be attached.






Assemble the invert by placing bolts from underneath the invert and working from the center to the ends of the circumferential seam. Place all the bolts, except for the last bolt hole, where the circumferential and longitudinal seams meet. Leave the last hole at the longitudinal seam open to be able to use drift pins for help in the alignment, if needed. This technique should be applied on all circumferential seams. The first few bolts up from the bottom centerline of the circumferential seam should be placed from the outside. The rest of the bolts may be placed from the inside. This will make tightening the bolts easier. After these invert plates are bolted and tightened, starting at the downstream or outlet end, place the side plates (4) and (5), on both sides of the invert. The side plates will be on top of the invert plate. Connect the next full side plates "A" (6) and (7) on the inside of both sides of the invert. First bolt (lightly torque) the invert's longitudinal seam at the lead end, then bolt (lightly torque) the triple plate lap at the side plate circumferential seam. After the longitudinal seam is bolted (lightly torqued), place the bolts in the circumferential seam working from the bottom to the top.

After bolting (lightly torquing) the cut plates and the two full side plates, place the cut crown plate (8) onto the side plates. To reach this height, you may need to use a lift or scaffolding inside of the structure. This will complete the first ring. After the crown cut plate is in place, lift the next full crown plate (9) marked "B" into place.

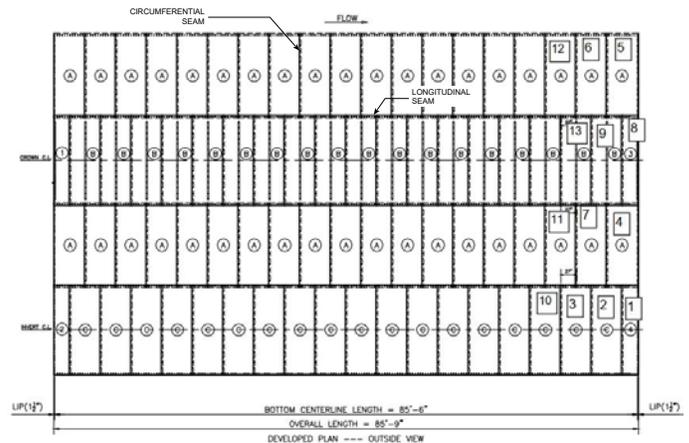






ALSP Round and Ellipse Shape Orientation

VIEW LOOKING DOWNSTREAM (ALSP ROUND STRUCTURE)

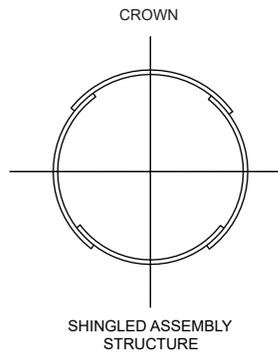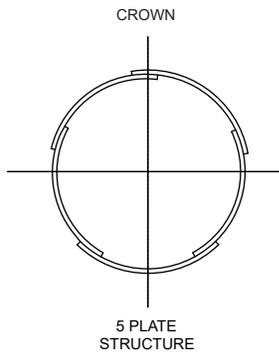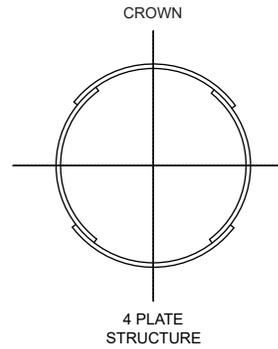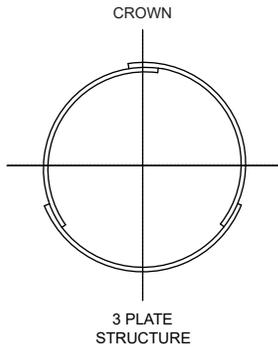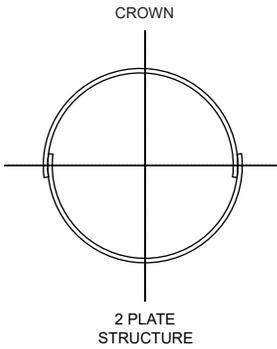

NOTE
WHERE INFILTRATION OF FINE GRAINED BACKFILL MATERIAL MAY OCCUR, SHINGLED ASSEMBLY CONSTRUCTION MUST BE USED.

VIEW LOOKING DOWNSTREAM (ALSP ELLIPTICAL STRUCTURE)

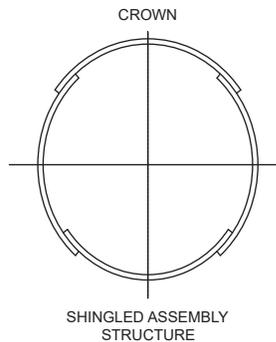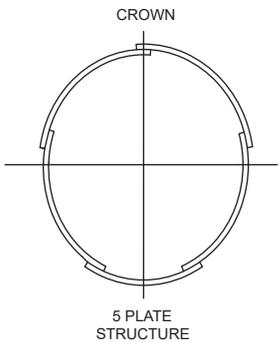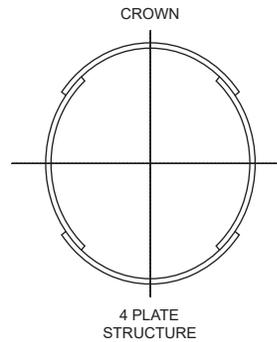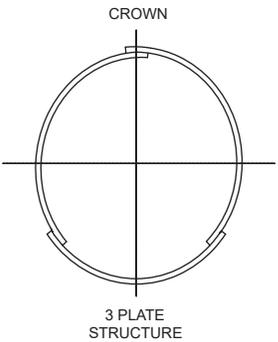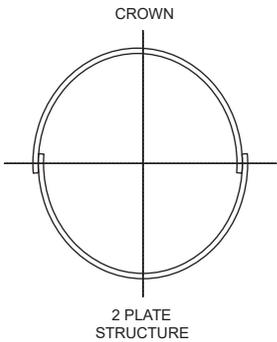

NOTE:
WHERE INFILTRATION OF FINE GRAINED BACKFILL MATERIAL MAY OCCUR, SHINGLED ASSEMBLY CONSTRUCTION MUST BE USED.

ASSEMBLY CONSIDERATIONS

1. If the structure includes a skew or bevel those structures should be assembled per the procedures described on pages 10 to 14. When cast-in-place concrete collars are to be installed, the Installer will need to allow for formwork to be erected on the end of the structure. Special bracing and/or scaffolding may be required. Skewed structure ends causes a variable corrugation profile through the plane of the skew. As a result, when forming cast-in-place collars or headwalls, this "roughness" will be present and should be factored into construction of formwork. Skewed and beveled plates may be cut in the shop prior to delivery to the site. Depending on project aesthetic requirements or the level of precision required with headwall or collar layout, field trimming may be required to provide a straight edge along the plane of the skew or bevel. Many contractors will prefer to cut skewed plates in the field when the formwork for the concrete headwall or collar is constructed to ensure the plane of the cut is at the desired location. Some contractors may also prefer to cut the plates in the field after the concrete headwall or collar is placed. This provides additional space for setting formwork at the face of the concrete headwall or collar and will allow for a clean, straight cut after the formwork is removed.
2. Water forces, including unexpected flooding, may bend assembled plates or cause flotation of the structure. The contractor should secure the upstream end by backfilling and constructing final end treatment as soon as possible.
3. It is crucial that the plate lapping/orientation is as shown on page 15. Please reference the Plate Layout Drawing.
4. Due to plate length and bolt hole diameter tolerances, periodic checks should be made to ensure that the structure length is not deviating from the nominal length.
5. Should the holes in the corrugation begin to shift off center, start in the middle of the circumferential seam and work one bolt at a time, proceeding in both directions towards the end of the plate. If you tighten the plate on the longitudinal seam first, all flexibility of the assembly is lost.
6. Should you encounter unpunched or misspunched holes, merely field drill another 7/8" diameter hole. Reference the standard plate detail on page 5 of this document for proper hole position and spacing.

IMPORTANT NOTICE ON SPIRALING

In spite of all precautions taken in manufacture and assembly, a long structure, in some cases, tends to spiral (rotation of the longitudinal seams). However, this tendency can be minimized and controlled by being alert to this possibility and taking prompt corrective action. This phenomenon is most commonly caused by erection methods. Structures that have experienced spiraling have generally been 200' or longer. The following suggestions will help control this tendency:

1. Assemble the overall run in shorter sections. Then join the sections together in the trench. It is important to monitor these connections to ensure that the spiraling is being corrected.
2. During assembly in place, leaving the bolts loose until all of the plates have been assembled permits additional adjustment to prevent spiraling.
3. The slotted bolt holes in the aluminum plate provides the opportunity to drift the plates into more regular alignment overcoming the spiraling tendency in longer structures.

Rotation to another circumferential hole may not be possible with pipe-arches, ellipses and other non-round shapes. When spiraling occurs with such shapes, return to straight circumferential seams for a series of rings until the structure is back online. Drilling or reaming the circumferential bolt holes should permit a rotation of about 1" per each circumferential seams.

Should the structure start to spiral, please follow the procedure outlined on #5 of the previous section.



Typical End View of a Round ALSP Structure

LIFTING

The lifting of preassembled sections of structures or entire structures is a proven and fairly common method of installation. However, attention must be given to proper techniques and safety measures. Structures must be lifted carefully in a controlled and balanced fashion. The use of a spreader beam with multiple lifting points is desirable and serves to better distribute lift loads. Additionally, the lift loads should be transmitted vertically to the structure, minimizing eccentric forces on lift assemblies and excessive bending.

The use of slings and/or full perimeter cables is recommended. Many structures, depending on the size, have also been lifted into place using eyebolts with plate assemblies. The type, number and location of lifting devices will be dependent upon the size, length and weight of the structure. Lifting devices are normally located at a seam with appropriate reinforcement, washers, etc. used to distribute the load.

Rigging a structure to be lifted into place should be done by proportioning the weight between the lifting points to achieve balanced loading and control. The rigging plan must be approved by the Engineer of Record; for additional guidance contact your Contech representative.

WARNING

THE CONTRACTOR MUST REVIEW ANY LIFTING PROCEDURE TO ENSURE THAT AN ADEQUATE SAFETY FACTOR HAS BEEN PROVIDED. THE CONTRACTOR MUST LIFT THE STRUCTURE INTO PLACE IN SUCH A MANNER AS TO NOT DAMAGE THE STRUCTURE. REVIEW ALL SAFETY GUIDELINES. ONCE THE ASSEMBLED STRUCTURE HAS BEEN LIFTED AND PLACED, CHECK THE BOLT TORQUE AND RE-TIGHTEN AS NECESSARY.

CAUTION

DO NOT ATTEMPT ANY LOADING OF A STRUCTURE (INCLUDING LIFTING A PREASSEMBLED STRUCTURE INTO PLACE) PRIOR TO THE TORQUING OF ALL NUTS. COME-A-LONGS AND/OR STRUTS MAY BE REQUIRED TO MAINTAIN STRUCTURE SPAN DIMENSION FOR OUT OF TRENCH ASSEMBLY AND INSTALLATION.



INSTALLATION

Basic Principles for ALSP Round and Ellipse Shapes

Project plans and specifications provide the basic requirements for construction and installation. However, site conditions may vary from those anticipated during design. The contractor and construction engineer must recognize these variations. Often, alternate or additional construction considerations are necessary. The following guidelines provide specific considerations and details for various conditions in a step-by-step construction sequence. (This summary is listed at the end of this manual.)

1. Check alignment in relation to the plans as well as the actual site conditions.
2. Excavate to the correct width, line and grade.
3. Provide a uniform, stable foundation—correct site conditions as necessary.
4. Unload, handle and store the plates and fasteners correctly and safely.
5. Assemble the structure properly—check alignment, follow special procedures for any items detailed on the plate layout drawings. Make sure to achieve properly aligned plate laps, bolt torque, and assembled dimensions.
6. Use a suitable (granular) backfill material as required in the plans and specifications.
7. Maintain proper backfill width.
8. Place haunch material around the structure properly.
9. Place the backfill in 8-inch thick uncompacted lifts and thoroughly compact each lift to a minimum 90% density (AASHTO T-180).
10. Maintain balanced fill placement and loading during all phases of installation, keeping fill height differential side to side to a 2' maximum amount.
11. Install the necessary end treatment to protect the structure from erosion and uplift.
12. Protect the structure from heavy construction equipment loads, other heavy loads and hydraulic forces.

LOCATION

Before installing any structure, it is best to first recheck the planned alignment and grade (position and percent of slope) of the structure in relation to the topography of the site. Even when complete construction plans are supplied, a careful examination of the site must be completed.

EXCAVATION

Embankment Condition

Typically, the excavation required for an embankment condition is to remove the topsoil, muck, organic matter and other fill deemed unsuitable by the project engineer and prepare a stable foundation at the proper elevation and grade.

Trench Condition

When structural plate is installed in a trench, there are some general guidelines that should be followed.

All trench excavation should proceed only after OSHA and other safety requirements are met. Trench excavation normally proceeds in the upstream direction. Most trenching equipment is more efficiently operated in this manner, and plate sections are also more easily joined when progressing in this direction. If an acceptable in-situ material is to be used as backfill, it should be stockpiled at a safe distance from the edge of the trench. As a general rule, when trench walls are unsupported, the distance from the trench edge to the toe of the stockpiled material should not be less than one-half the depth of the trench. When trench walls are protected by some form of sheeting or shoring, a safe minimum distance between the trench edge and stockpiled material must still be maintained, but will vary with soil and bracing types.

Care should always be exercised in the operation of equipment in the vicinity of an open trench. Operated too close to the trench, equipment weight and vibration may collapse the trench walls. The three phases of construction in a trench (excavation, structure installation, and backfilling) should be scheduled in close sequence with each other. An open trench is dangerous and vulnerable to accidents. An open excavation can result in damage to the project under construction. The two main hazards that must always be considered in trenching work are:

- Stability of trench walls; and
- Water that may accumulate in the trench resulting from seepage and surface runoff.

To minimize accidents and losses resulting from trenching operations the following procedures should be followed:

- Begin excavation only when installation of structural plate can immediately follow.
- Protect trench walls to insure their stability throughout the construction period.
- Follow procedures that will keep the trench free of seepage and surface waters.
- Excavate the trench at the same rate as structure installation with a minimum distance, as dictated by safety, separating the two operations.
- Backfill the trench as soon as practicable after structural plate installation.

Trench Width and Shape

The width and shape of the trench should be as shown on the plans. Any change should be approved by the Engineer.

The trench width must be wide enough to allow the critical lower quadrants of a structure with an invert to be properly backfilled (haunched).

Figure 11 (on page 24) provides guidelines about minimum spacing between multiple structures. These same guidelines can be used to provide the necessary width between the structural plate and trench wall to adequately place and compact typical backfill. Lesser spacing may be used with slurries and other backfill materials that do not require mechanical compaction.

PREPARING FOUNDATIONS

The structure foundation requirements should be detailed on the plan sheets. However, field conditions may vary requiring special attention and alterations that are discovered only during excavation. Any alterations should first be approved by the project engineer. The critical factor is to achieve uniformity along the structure. The foundation has a tendency to yield under the structure in relation to the embankments alongside the structure.

Bedding is the material located between the prepared foundation soils and the invert (or bottom) of the structure. Bedding is an important part of the installation, because it provides the interface between the rigid or unyielding foundation and the aluminum structure. Structures with inverts require proper bedding preparation. The bedding layer consists of loose granular soil that will fill in the structure corrugations as the structure is assembled and backfilled to ensure the structure is fully supported.

Although corrugated aluminum drainage structures can experience some uneven settlement without distorting, they should be placed on a firm yet yielding, uniform foundation for best performance and long service life.

All structures with an invert must be installed with the area under the haunches well compacted and all voids filled. The most popular method of preparing the foundation is by excavating to a flat surface and then carefully tamping the fill under the haunches of the structure. See Figure 1 for guidance.

All structural plate must be placed on stable earth or fine granular foundation. Never install them on sod, frozen earth or on a bed that contains large boulders or rock. When poor foundations with low bearing strength are encountered, it may be necessary to stabilize the poor foundation by a method described in the next section.

Care must be taken to prevent water leaking through the fill or along the length of the structure. When granular materials have been used for structure bedding and select backfill, the exposed ends of the fill slopes should be sealed against infiltration. This can be done by utilizing slope paving, cut-off walls, construction of slope faces utilizing impermeable fill or some similar type of end treatment that guards against water infiltration and migration through the structure select fill and bedding zones.

UNEVEN FOUNDATIONS

When the excavated grade line reveals both soft and hard spots, the foundation must be changed to make it as uniform as possible. Sometimes hard spots can be excavated below grade and replaced with softer material. Alternatively, it may be more economical to excavate the entire foundation slightly below grade line and replace it with suitable, uniform material. In any event, any abrupt changes from hard to soft foundation must be avoided.

SOFT FOUNDATIONS

When soft, unstable material is encountered at the foundation level, it must be excavated below the flow line grade and backfilled to grade with sand, gravel, crushed stone or other suitable material. The zone of select material must be adequate to support the structure and backfill. See Figure 2. When unexpected materials are encountered, consult the project engineer.

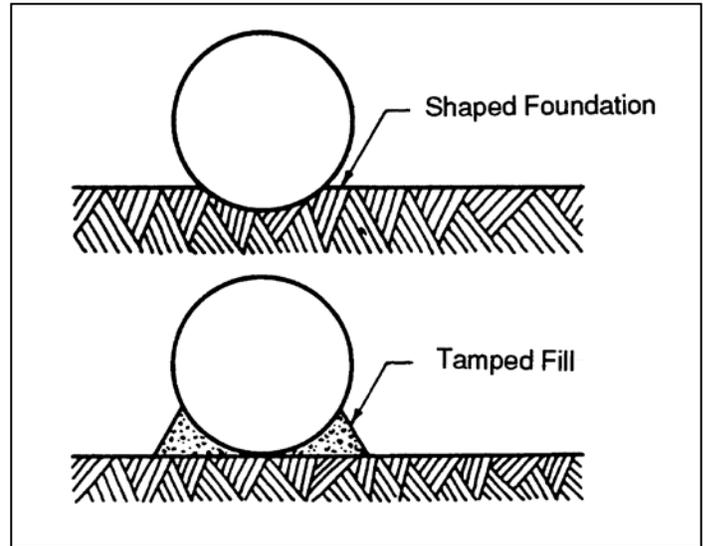


Figure 1. Methods for attaining proper compaction under haunches of structural plate round and ellipse shapes.

POCKETS OF UNSTABLE SOIL

If unstable foundation material is in small pockets, it is best to excavate all of the poor foundation and replace it with suitable backfill material. Frequently, a relatively thin mat of granular material will provide satisfactory support, but it may be necessary to replace very soft foundations to a depth great enough to support not only the structure, but also the heavier backfill placed beside it.

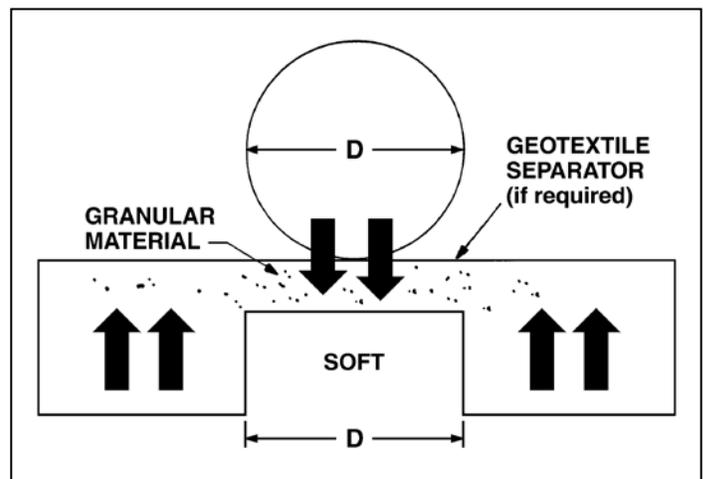


Figure 2. Soft Foundation Considerations

IMPROVED FOUNDATIONS

Whenever a foundation is stabilized by undercutting and replacing substandard, poor quality materials with a coarsely graded granular fill material, consideration of the adjacent bedding and backfill material becomes even more important. The adjacent side fill zones must also be properly supported to prevent excessive differential settlement that could lead to dragdown loads on the structure. Additionally, finer graded fill materials can migrate into the more coarsely graded fill. Use of a geotextile separator should be considered to prevent such migration of fill particles. Attempts to support structural plate structures on intermittent piles, pile bents or concrete cradles to provide support over zones of poor foundation support creates the potential risk of introducing differential settlement issues for the structure system and for the adjacent side fill and thus should be avoided.

ROCK FOUNDATIONS

Rock encountered in the foundation must be removed to provide more than the minimum bedding thickness underneath the bottom of the structure. Excavate wide enough to avoid any possibility of the structure resting on rock and provide access to adequately haunch the structure as shown in Figure 3 (right). The excavated area is then backfilled with lightly compacted, granular soil to cushion the structure.

STREAM DIVERSION

If the stream is temporarily diverted during construction, the diversion ditch or temporary drainage structure must be adequate to carry the flow. Reduced construction times are helpful in limiting this exposure. The structure installation must be protected from storm flows by a temporary dike, cofferdam, etc.

If the structure must carry the flow during the construction stage, the upstream end must be protected with the proper end treatment, etc. to ensure that the flow is not diverted around or beside the structure thereby scouring out backfill as it is placed or floating the structure. In phased construction, it is desirable to construct and backfill the upstream end first.

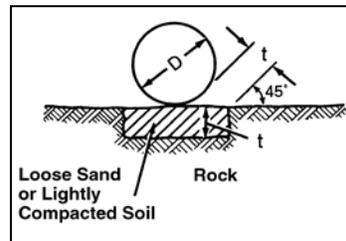


Figure 3. Method of handling rock foundations. $t = 1/2''$ per foot of fill over structure, with 24'' the maximum.



Reline installation of ALSP round

BACKFILLING

ALSP Round and Ellipses

PLACING THE BACKFILL

It is important to emphasize the necessity of adequate backfill and proper placement. Improper compaction has led to more trouble with structure installations, flexible and rigid, than all other factors combined!

For trench installations, backfill must follow as closely behind the excavation and assembly stages as possible. Embankment installations typically are backfilled after the entire structure, or a major portion of it, is assembled. Unless the embankment and backfill materials are placed simultaneously, one must be benched so the other can be compacted against it.

The backfill should be carefully compacted under the haunches (lower part of structure exterior, below widest part).

Continue placing the backfill equally on both sides of the structure in 8-inch uncompacted lifts, thoroughly compacting each lift(s) to a 90% density (AASHTO T180). Backfill lift(s) shall be placed symmetrically on each side, with no side to side differential exceeding 24". Such compacted lift(s) must extend to the limits shown on the plans on each side of the structure, or to the side of a trench, or to the natural ground line.

A frequent problem during backfilling is having the material dumped in piles around the structure. It is the responsibility of the contractor to ensure that these piles get evenly spread so that there is a maximum depth of 8 inches of loose lift. If the filling crew works too fast, the compaction crew never has a chance to adequately compact the first material before more is placed in the trench. Please see Figure 4 on the right, and Figures 5 and 6 on the next page, for proper guidance.

Backfill must be placed and fully compacted to the minimum cover level as indicated on the plans, before the structure is subjected to its design live load or highway loads. When dealing with construction equipment that may exceed legal highway loads, an extra thickness of compacted fill, beyond that required for minimum cover, may be required. See construction loads, page 25.

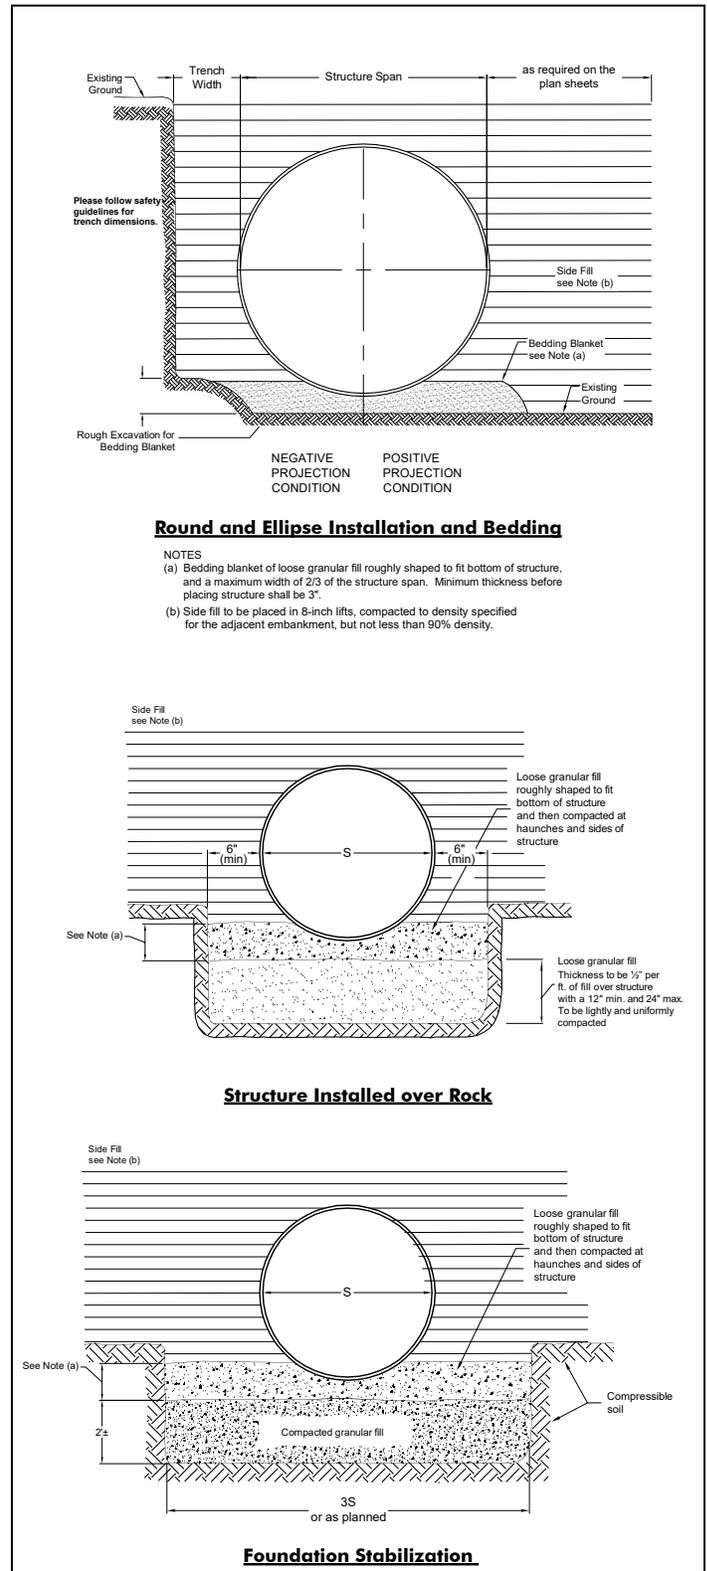


Figure 4. Bedding and Backfill Details.

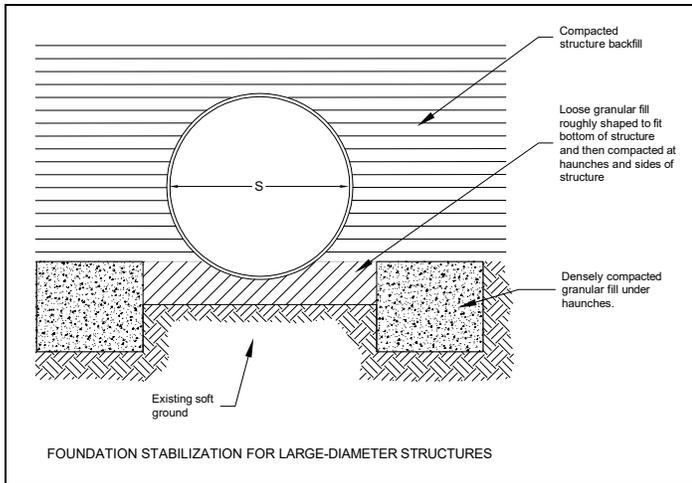


Figure 5. Bedding and Backfill Details.

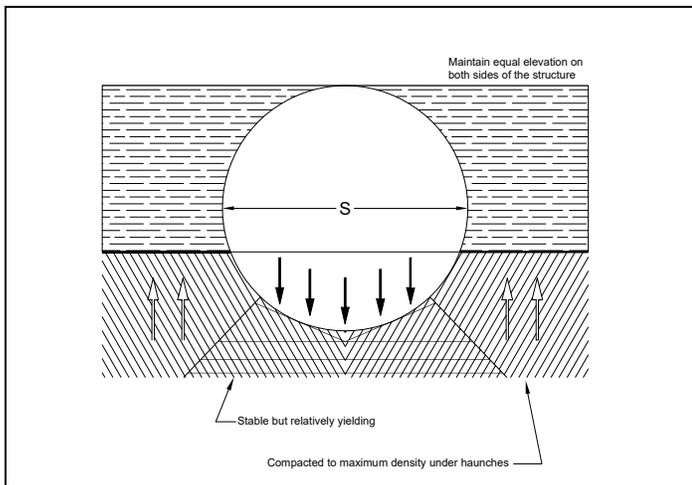


Figure 6. Recommended backfilling practice for larger round shapes, using a vee-shaped bed.

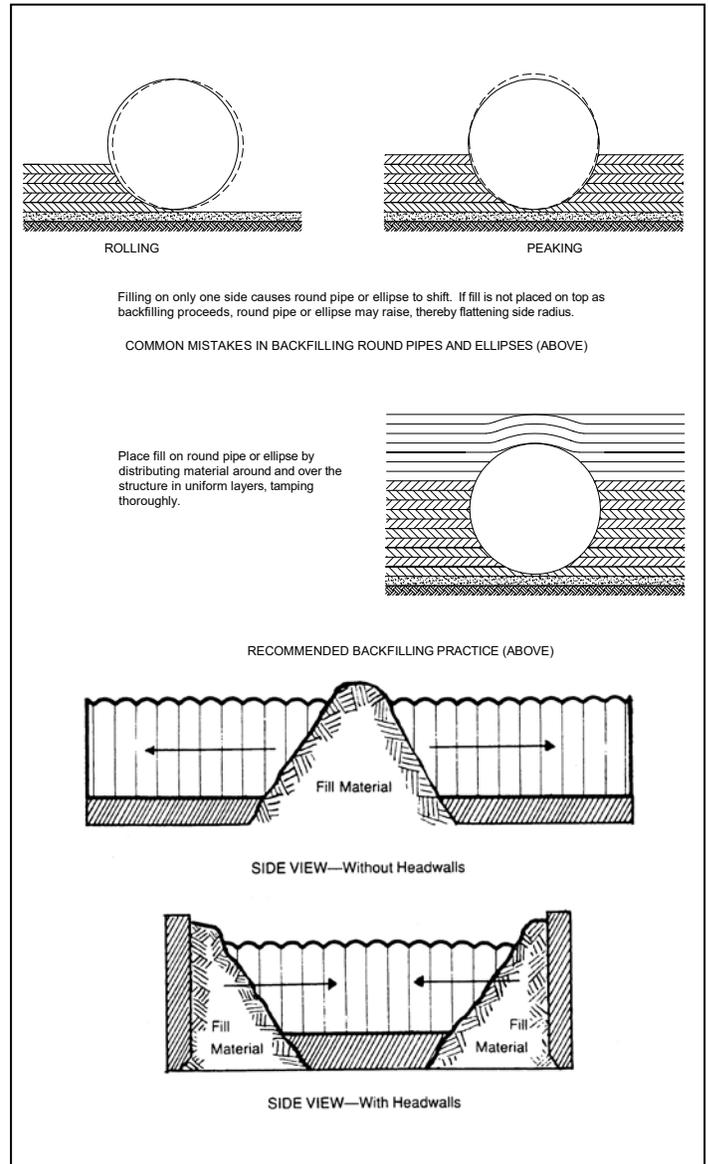


Figure 7. Recommended backfilling practice for structural plate.

If the headwalls are built before the structure, the backfill material should first be placed adjacent to each headwall. Place and compact material uniformly on both sides of the structure until the top of the structure is reached. Then backfill should proceed toward the center by extending the ramp, with care being taken to place and compact the material evenly on both sides of the structure. Top loading will help control peaking. Please see Figure 7 above.

PROPER MATERIAL PLACEMENT

The bedding and backfill operation should be entirely conducted in the dry if at all possible, but with enough moisture to meet compaction standards. There are cases where ALSP structures are preassembled and lifted into the stream bed "in the wet," where it is not possible to build a cofferdam and divert the stream. Such conditions make it very difficult to ensure good base preparation and proper backfill. Soil strength consideration must be made by the designer in these cases, and expert advice obtained on backfill procedures

The areas immediately next to the structure shall be compacted by hand-operated methods. Larger compaction equipment shall be brought within no closer than 4 feet in most embankment installations. Changes in dimension or plumb of the structure warn that heavy machines must work further away or be replaced with lighter, more suitable equipment.

Full compaction density levels may not be achieved in the first several inches of fill over the top of the structure due to flexing and vibration.

When required, as determined by the geotechnical engineer, a geotextile or graded soil filter may be used between the select backfill and the in-situ soil to prevent migration of fines and possible internal erosion. Spread backfill material with equipment running parallel to, not at right angles to the structure. Please see Figure 9 below.

SUMMARY OF BACKFILL PLACEMENT GUIDELINES

Compact the backfill by working parallel to, but not immediately adjacent to, the structure.

Place fill evenly on both sides. Peaking or rolling of the structure must be avoided. (Note discussion of shape control, in the next column.)

For multiple barrel installations, sufficient space between the structures must be allowed for compaction equipment to operate properly.

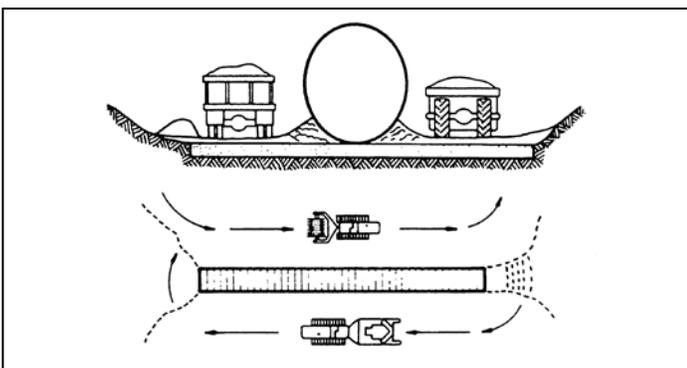


Figure 8. Proper material placement.

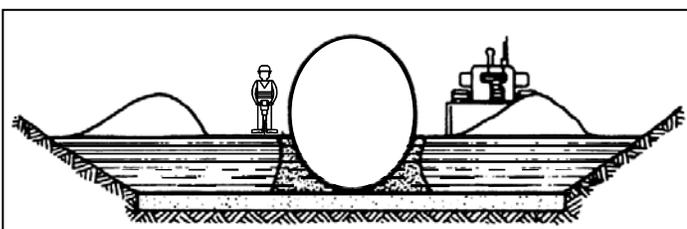


Figure 9. Hand compaction and heavy equipment procedure.

As backfill progresses, place the select material in radial lifts at approximately 75% of the rise of the structure. See Figure 10 below.

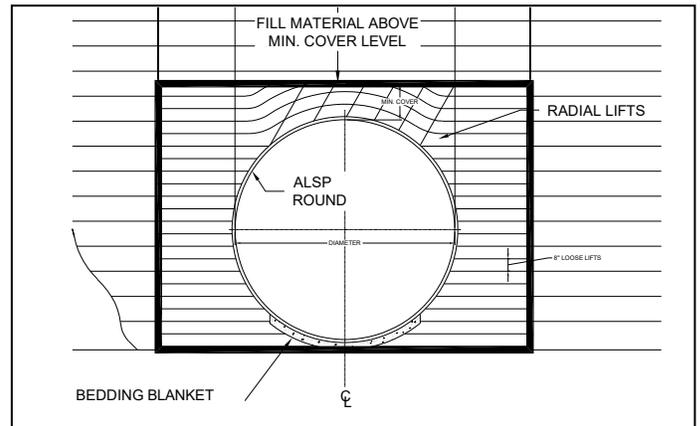


Figure 10. Radial backfill detail

When the fill on both sides approaches the crown of the structure (see the Recommended Backfilling Practice in Figure 7), the same techniques of spreading shallow layers and compacting thoroughly must be followed as the fill covers the structure. For the initial layers over the structure, light hand or walk-behind compaction equipment is necessary. Please see Figure 9.

After backfilling 2 ft. over the top or to a depth of 1/8th the span, whichever is greater, and no changes outside the allowable tolerances in the structure's dimensions have been observed, then further filling to grade may continue using procedures applicable to embankment construction. See information regarding construction loading.

SHAPE CONTROL

Shape control refers to monitoring the symmetry of the structure during the backfilling process. Two movements may occur during backfilling: "peaking," caused by the pressure of the compaction of the sidefill, and rolling or sidewall distortion-caused by generating compaction forces on one side of the structure relative to the other. See the top of Figure 7.

Shape changes are limited by using proper backfill compaction procedures and equipment as well as backfill, material quality, gradation and moisture content. Special attention should be paid to maintaining the structure's rise dimensions, symmetry and smooth, consistent curvature.

The "plumb-bob" method of deflection control is most convenient and effective for large structures. Suspend plumb bobs from the shoulder (2 and 10 o'clock) positions so that the points are a specific vertical distance from a marked point on the invert at start of backfill.

Peaking or deflection action can be detected when the points of the bobs move vertically. Corrective action is usually to keep heavy equipment further away from the structure. Placing and compacting backfill in thinner lifts and/or bringing the backfill to the proper moisture content will reduce the necessary compactive effort and help to control peaking.

Rolling action can be detected when the plumb-bobs move laterally. It is corrected by filling or compacting on the side towards which the plumb-bob has moved. For example, a roll to the right will be corrected by higher fill on the right.

Careful observance of the deflection control plumb-bobs and prompt remedial steps prevents peaking or rolling action from distorting the structure.

MULTIPLE BARREL INSTALLATIONS

Backfill must be balanced across all the structures at all times. Place backfill material with a stonebucket, conveyor or other device in a balanced and symmetrical fashion to assure that even pressure is felt on both sides of all the structures. The design should have provided adequate room between the structures to operate the equipment required for proper compaction of the backfill. Flowable fills that require no compaction effort can be used with minimal spacing between the structures.

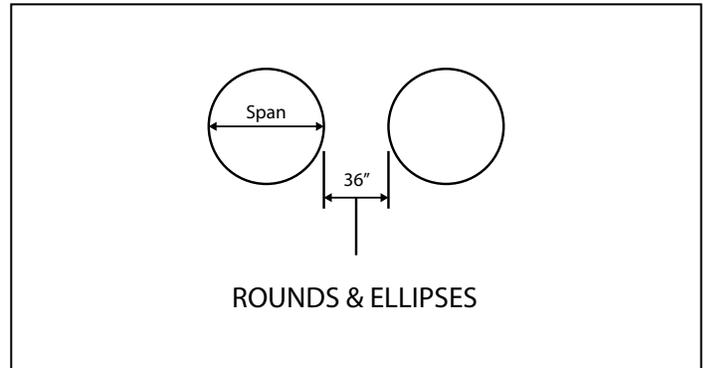


Figure 11. Minimum Barrel Spacing.

Recommended minimum spacings for round ellipses are shown in Figure 11. The spacings are for the use of all standard backfill materials and allow room for compacting the backfill.

The minimum spacing shown also provides adequate room between the structure and the trench wall for adequate material placement and compaction.

Appropriate equipment should be considered in determining the spacing between the structures. More than the 36" minimum spacing may be needed for larger span structures. The space between structures should allow efficient operation and selection of compaction equipment. Please contact your Contech representative for assistance.

FINAL BACKFILLING

Once the envelope of select backfill material has been properly placed and compacted around and over the structure, the remainder of the fill, if any, should be placed and compacted to prevent settlement at the surface. The specified backfill material and compaction level requirements are written to prevent surface subsidence, protect the pavement, etc.

When thick sheeting, such as wood, has been used to support the trench walls be sure to fill and compact the voids left when it is withdrawn or, cut it off above the crown of the structure.

Final backfill is compacted by conventional methods. The use of water flooding or jetting should be limited to compacting soils which are sufficiently permeable to dispose of the excess water and should not be used with cohesive soils.

Compaction Equipment

HAND COMPACTION

For compacting the areas under the haunches of a structure, hand tampers or light vibratory equipment is needed.

MECHANICAL COMPACTORS

Most types of power tampers are satisfactory in all except the most confined areas. However, they must be used carefully and completely over the entire area of each layer to obtain the desired compaction. Avoid striking the structure with power tamping tools.

ROLLER COMPACTORS

The fill adjacent to the structure should be tamped with hand or hand-held power equipment. However, where space permits, sheepfoot, rubber tired and other types of rollers can be used to compact backfill beyond 3' to 4' from the structure.

VIBRATING COMPACTORS

Vibrating compactors can be used effectively on all types of backfill except heavy clays or other plastic soils. Small walk behind equipment is especially suited to trench installations.

STRUCTURE PROTECTION

Often, construction loads exceed the finished design loads for the structure. Additionally, during the various phases of assembly, backfill and construction, the structure typically is more vulnerable to loadings and hydraulic forces because its backfill, end treatment, etc. are not complete. The corrugated aluminum structure must be properly protected.



Adequate, uniform compaction is critical to building soil/aluminum structures.

CONSTRUCTION LOADS

Frequently, it is necessary for heavy construction equipment to travel over installed corrugated aluminum structures during completion of grading, paving or other site work. Heavy construction equipment can impose concentrated loads far in excess of those the structure is designed to carry.

Adequate protection of the corrugated aluminum structure may require more than finished design fill. The amount of additional fill needed depends on the equipment axle loads.

The actual minimum cover heights required for heavier construction vehicle live loads will vary based on the anticipated construction equipment (size, weight and axle loads). Other factors influencing the minimum cover height requirements are structure size, shape and gage combined with local site conditions. These factors need to be addressed by the engineer and/or contractor prior to the start of construction.

The cover depth required for protection from construction equipment loads is measured from the crown of the structure to the top of the maintained construction roadway surface. Additionally, the roadway surface for the construction loading and vehicular traffic conditions shall be well-maintained and free of ruts for the duration of the temporary vehicle crossings. Contact your local Contech representative for additional information.

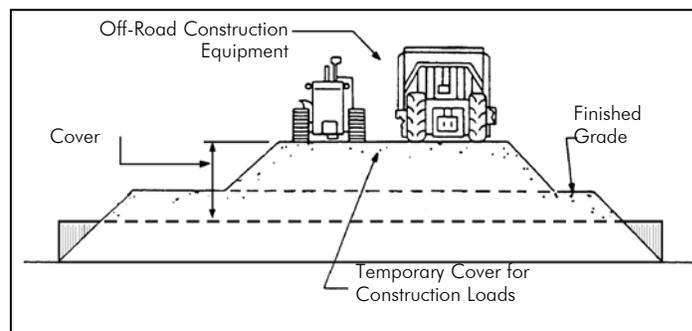


Figure 12. Minimum cover for construction loads.

Temporary dead loads resulting from storage piles, crane placements, etc. must be evaluated as to structure capacity, loading balance, backfill support, adequate foundation strength, and other factors that may be applicable to the conditions.

HYDRAULIC PROTECTION

During installation, and prior to the completion of backfilling and the construction of permanent end treatments, slope protection, flow controls, etc., the structure is vulnerable to damage from storm and flow conditions. Hydraulic flow forces on unprotected ends, unbalanced backfill loads, loss of backfill and support due to erosion and uplift forces are examples of factors to be considered. While guidance is offered in some of the above sections, temporary protection may need to be constructed.

Hydraulic forces can float structures without adequate protection or buckle inverts (large radius inverts are especially vulnerable to buckling) if the foundation, bedding or backfill becomes saturated. Proper channeling of flow through active structures and placing end treatments and slope protection as soon as possible are advised. Structures installed between cofferdams or in trenches subject to inundation should be protected from the effects of ponded water.

Summary

Proper installation of any drainage structure will result in longer and more efficient service. This installation manual is intended to call attention to both good practice and to warn against possible pitfalls. The principles apply to most conditions. It is not a specification but an aid to your own experience.

The following items should be checked to insure proper installation:

1. Check alignment in relation to the plans as well as the actual site conditions.
2. Make certain the structure length(s), sizes and necessary fittings and appurtenances, etc. are correct.
3. Excavate to the correct width, line and grade.
4. Provide a uniform, stable foundation—correct site conditions as necessary.
5. Unload, handle and store the structure correctly and safely.
6. Assemble the structure properly—check alignment, follow special procedures for any items detailed on the plate layout drawings. Make sure to achieve properly aligned plate laps, bolt torque, and assembled dimensions.
7. Use a suitable (granular) backfill material as required in the plans and specifications.
8. Maintain proper backfill width.
9. Place haunch material around the structure properly.
10. Place the backfill in 8-inch thick uncompacted lifts and thoroughly compact each lift to a minimum 90% density (AASHTO T-180).
11. Maintain balanced fill placement and loading during all phases of installation, keeping fill height differential side to side to 2' maximum.
12. Install the necessary end treatment to protect the structure from erosion and uplift.
13. Protect the structure from heavy construction equipment loads, other heavy loads and hydraulic forces.





CONTECH[®]
ENGINEERED SOLUTIONS
800-338-1122
www.ContechES.com

SUPPORT

Drawings and specifications are available at www.ContechES.com.

Site-specific design support is available from our engineers.

Contech Engineered Solutions provides site solutions for the civil engineering industry. Contech's portfolio includes bridges, drainage, sanitary sewer, stormwater and earth stabilization products. For information on other Contech division offerings, visit www.ContechES.com or call 800.338.1122

NOTHING IN THIS CATALOG SHOULD BE CONSTRUED AS A WARRANTY. APPLICATIONS SUGGESTED HEREIN ARE DESCRIBED ONLY TO HELP READERS MAKE THEIR OWN EVALUATIONS AND DECISIONS, AND ARE NEITHER GUARANTEES NOR WARRANTIES OF SUITABILITY FOR ANY APPLICATION. CONTECH MAKES NO WARRANTY WHATSOEVER, EXPRESS OR IMPLIED, RELATED TO THE APPLICATIONS, MATERIALS, COATINGS, OR PRODUCTS DISCUSSED HEREIN. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND ALL IMPLIED WARRANTIES OF FITNESS FOR ANY PARTICULAR PURPOSE ARE DISCLAIMED BY CONTECH. SEE CONTECH'S CONDITIONS OF SALE (AVAILABLE AT WWW.CONTECHES.COM/COS) FOR MORE INFORMATION.

© 2022 Contech Engineered Solutions LLC, a QUIKRETE Company